

SXW SERIES

105°C Overvoltage Venting Specification

- Load Life : 105°C 1000~2000 hours.
- This series has specification of vent operation in overvoltage situation. Please consult us for any further details.

RoHS
compliance

◆SPECIFICATIONS

Items	Characteristics													
Category Temperature Range	−25~+105°C													
Rated Voltage Range	200, 400Vdc													
Capacitance Tolerance	±20%(20°C,120Hz)													
Leakage Current(MAX)	$I=3\sqrt{CV}$ (After 5 minutes application of rated voltage) I=Leakage Current(μA) C=Capacitance(μF) V=Rated Voltage(Vdc)													
Dissipation Factor(MAX) (tanδ)	0.15(20°C,120Hz)													
Endurance	After applying rated voltage with rated ripple current for specified time at 105°C, the capacitors shall meet the following requirements. <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 45%;">Capacitance Change</td> <td style="width: 55%;">Within ±20% of the initial value.</td> </tr> <tr> <td>Dissipation Factor</td> <td>Not more than 200% of the specified value.</td> </tr> <tr> <td>Leakage Current</td> <td>Not more than the specified value.</td> </tr> </table> <table border="1" style="margin-top: 10px; width: 100%; border-collapse: collapse;"> <tr> <th style="width: 45%;">Capacitance (μF)</th> <th style="width: 55%;">Life Time (hrs)</th> </tr> <tr> <td>4.7</td> <td>1000</td> </tr> <tr> <td>≥10</td> <td>2000</td> </tr> </table>		Capacitance Change	Within ±20% of the initial value.	Dissipation Factor	Not more than 200% of the specified value.	Leakage Current	Not more than the specified value.	Capacitance (μF)	Life Time (hrs)	4.7	1000	≥10	2000
Capacitance Change	Within ±20% of the initial value.													
Dissipation Factor	Not more than 200% of the specified value.													
Leakage Current	Not more than the specified value.													
Capacitance (μF)	Life Time (hrs)													
4.7	1000													
≥10	2000													
Low Temperature Stability Impedance Ratio(MAX)	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 25%;">Rated Voltage (Vdc)</td> <td style="width: 25%;">200</td> <td style="width: 25%;">400</td> <td style="width: 25%;">(120Hz)</td> </tr> <tr> <td>Z(−25°C)/Z(20°C)</td> <td>3</td> <td>8</td> <td></td> </tr> </table>		Rated Voltage (Vdc)	200	400	(120Hz)	Z(−25°C)/Z(20°C)	3	8					
Rated Voltage (Vdc)	200	400	(120Hz)											
Z(−25°C)/Z(20°C)	3	8												

◆MULTIPLIER FOR RIPPLE CURRENT

		Frequency (Hz)	60(50)	120	500	1k	10k≤
Coefficient	200Vdc	0.80	1.00	1.10	1.14	1.18	
	400Vdc	4.7μF	0.65	1.00	1.05	1.10	1.15
	10~100μF	0.80	1.00	1.05	1.10	1.15	

◆PART NUMBER


□□□ SXW
 Rated Voltage Series □□□□□ M
 Capacitance Capacitance Tolerance □□□ Option □□ D×L
 Lead Forming Case Size

◆OPTION

	Code
PET Sleeve	EFC

◆DIMENSIONS

(mm)

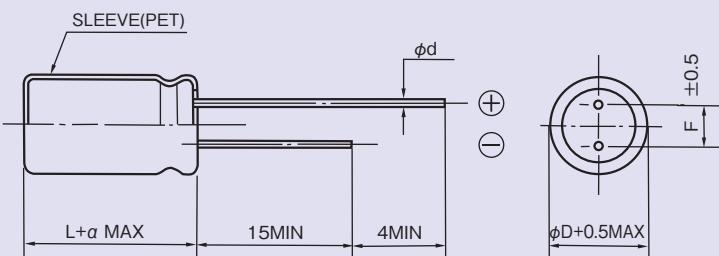

ϕD	10	12.5	16	18
ϕd	0.6		0.8	
F	5.0		7.5	
a	1.5			

◆STANDARD SIZE

Rated Voltage (Vdc)	Capacitance (μF)	Size $\phi D \times L$ (mm)	Rated Ripple Current (A r.m.s./105°C, 120Hz)
200	68	16×20	0.32
	82	16×20	0.36
	82	16×25	0.38
	82	18×20	0.37
	100	16×25	0.43
	100	16×30	0.45
	100	18×20	0.43
	120	16×25	0.48
	120	16×30	0.50
	120	18×20	0.46
	120	18×25	0.48
	130	18×20	0.46
	150	16×30	0.57
	150	16×35	0.59
	150	18×20	0.50
	150	18×25	0.53
	150	18×30	0.58
	180	16×40	0.66
	180	18×25	0.60
	180	18×30	0.62
	220	18×30	0.71
	220	18×35	0.74
	270	18×35	0.77
	270	18×45	0.89
	330	18×40	0.91

Rated Voltage (Vdc)	Capacitance (μF)	Size $\phi D \times L$ (mm)	Rated Ripple Current (A r.m.s./105°C, 120Hz)
400	4.7	10×10	0.060
	10	10×16	0.087
	10	12.5×20	0.10
	22	16×20	0.17
	22	16×25	0.18
	27	16×25	0.22
	33	16×25	0.22
	33	16×30	0.24
	33	18×20	0.23
	33	18×25	0.25
	36	18×20	0.24
	39	16×30	0.27
	39	18×25	0.27
	47	16×30	0.30
	47	16×35	0.32
	47	18×20	0.28
	47	18×25	0.30
	47	18×30	0.32
	56	16×35	0.34
	56	16×40	0.36
	56	18×30	0.35
	56	18×35	0.37
	68	16×40	0.39
	68	18×35	0.40
	68	18×40	0.42
	82	18×40	0.46
	82	18×45	0.48
	100	18×45	0.52