

MOS FET Relays

G3VM-355J/JR

**MOS FET Relay with Both SPST-NO and SPST-NC Contacts Incorporated in a Single SOP Package.
General-purpose (high On-resistance) Series Added.**

- SPST-NO/SPST-NC models with an 8-pin SOP package in the 350-V load voltage series.
- Continuous load current of 120 mA.
- Dielectric strength of 1,500 Vrms between I/O.
- RoHS Compliant.

■ Application Examples

- Broadband systems
- Measurement devices and Data loggers
- Amusement machines



Note: The actual product is marked differently from the image shown here.


■ List of Models

Contact form	Terminals	Load voltage (peak value)	Model	Number per stick	Number per tape
SPST-NO/ SPST-NC	Surface-mounting terminals	350 VAC	G3VM-355JR	50	---
			G3VM-355J		
			G3VM-355JR(TR)	---	2,500
			G3VM-355J(TR)		

■ Dimensions

Note: All units are in millimeters unless otherwise indicated.


G3VM-355J/JR

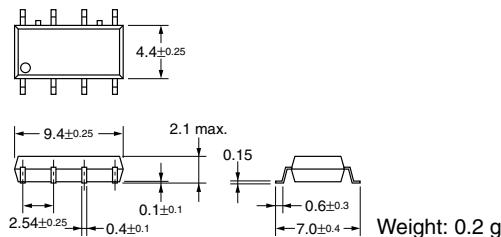

Note: The actual product is marked differently from the image shown here.


■ Terminal Arrangement/Internal Connections (Top View)

G3VM-355J/JR

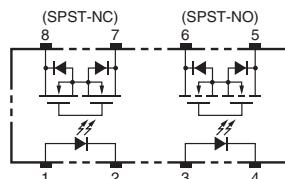

■ Actual Mounting Pad Dimensions (Recommended Value, Top View)

G3VM-355J/JR

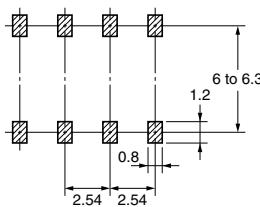

■ Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Item	Symbol	Rating	Unit	Measurement conditions
Input	LED forward current	I_F	50	mA
	Repetitive peak LED forward current	I_{FP}	1	A
	LED forward current reduction rate	$\Delta I_F/\text{°C}$	-0.5	mA/°C
	LED reverse voltage	V_R	5	V
	Connection temperature	T_j	125	°C
Output	Load voltage (AC peak/DC)	V_{OFF}	350	V
	Continuous load current	I_O	120 (90)	mA
	ON current reduction rate	$\Delta I_{ON}/\text{°C}$	-1.2 (-0.9)	mA/°C
	Connection temperature	T_j	125	°C
Dielectric strength between input and output (See note 1.)	V_{I-O}	1,500	V_{rms}	AC for 1 min
Operating temperature	T_a	-40 to +85	°C	With no icing or condensation
Storage temperature	T_{stg}	-55 to +125	°C	With no icing or condensation
Soldering temperature (10 s)	---	260	°C	10 s

Values inside parenthesis () are for G3VM-355J

■ Electrical Characteristics ($T_a = 25^\circ\text{C}$)

Item	Symbol	Minimum	Typical	Maximum	Unit	Measurement conditions
Input	LED forward voltage	V_F	1.0	1.15	1.3	V $I_F = 10 \text{ mA}$
	Reverse current	I_R	---	---	10	μA $V_R = 5 \text{ V}$
	Capacity between terminals	C_T	---	30	---	pF $V = 0, f = 1 \text{ MHz}$
	Trigger LED forward current	I_{FT}	---	1	3	mA SPST-NO: $I_O = 120 \text{ mA}$
		I_{FC}				SPST-NC: $I_{OFF} = 10 \mu\text{A}$
Output	Maximum resistance with output ON	R_{ON}	---	15 (40)	25 (50)	Ω SPST-NO: $I_F = 5 \text{ mA}, I_O = 120 \text{ mA}$
	Current leakage when the relay is open	I_{LEAK}	---	0.0015 NO (0.006) 0.0105 NC (0.003)	1.0	μA $V_{OFF} = 350 \text{ V}$
	Capacity between terminals	C_{OFF}	---	65 (30)	---	pF $V = 0, f = 1 \text{ MHz} (\text{NO})$ $V = 0, f = 1 \text{ MHz}, I_F = 5 \text{ mA}$ (NC)
Capacity between I/O terminals	C_{I-O}	---	0.8	---	pF	$f = 1 \text{ MHz}, Vs = 0 \text{ V}$
Insulation resistance	R_{I-O}	1,000	---	---	MΩ	$V_{I-O} = 500 \text{ VDC}$, $R_{OH} \leq 60\%$
Turn-ON time	SPST-NO	t_{ON}	---	0.18 (0.3)	1.0 (1.0)	ms $I_F = 5 \text{ mA}, R_L = 200 \Omega$, $V_{DD} = 20 \text{ V}$ (See note 2.)
	SPST-NC		---	0.15 (0.25)	1.0 (1.0)	ms
Turn-OFF time	SPST-NO	t_{OFF}	---	0.11 (0.15)	1.0 (1.0)	ms
	SPST-NC		---	0.7 (0.5)	3.0 (1.0)	ms

Values inside parenthesis () are for G3VM-355J

■ Recommended Operating Conditions


Use the G3VM under the following conditions so that the Relay will operate properly.

Item	Symbol	Minimum	Typical	Maximum	Unit
Load voltage (AC peak/DC)	V_{DD}	---	---	280	V
Operating LED forward current	I_F	5	10	25	mA
Continuous load current (AC peak/DC)	I_O	---	---	120 (90)	mA
Operating temperature	T_a	-20	---	65	°C

Values inside parenthesis () are for G3VM-355J

- Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.




- Note: 2. Turn-ON and Turn-OFF Times

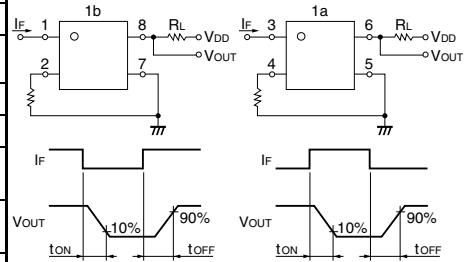







■ Engineering Data

G3VM-355J







Common Characteristics; SPST-NO / SPST-NC

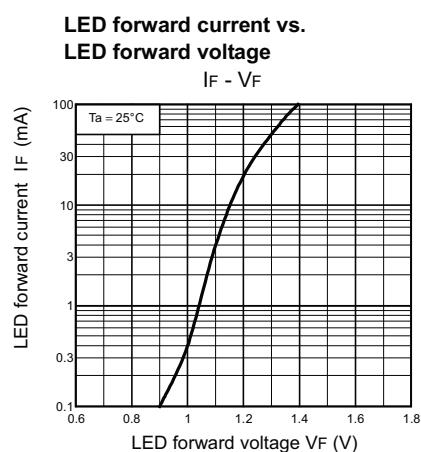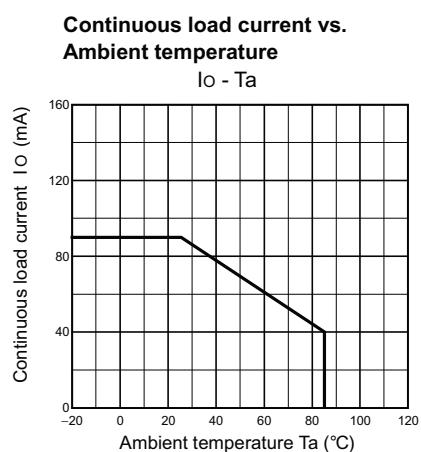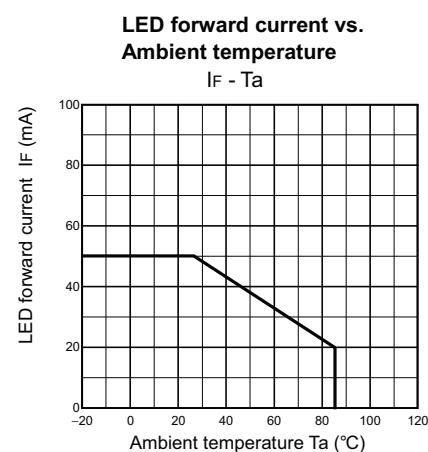

Characteristics; SPST-NO

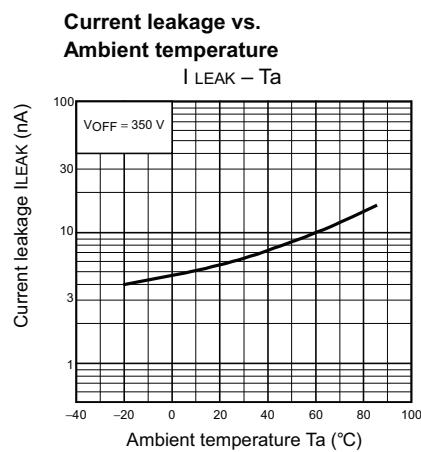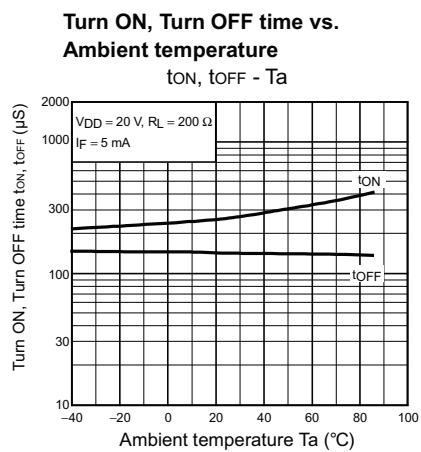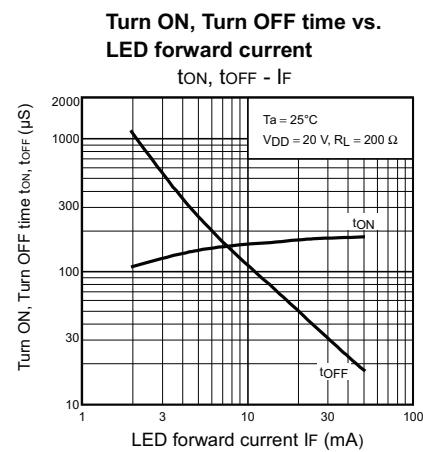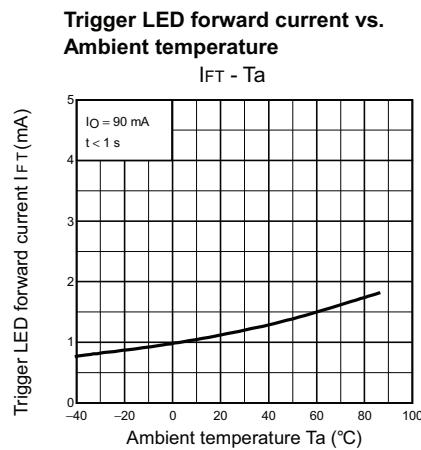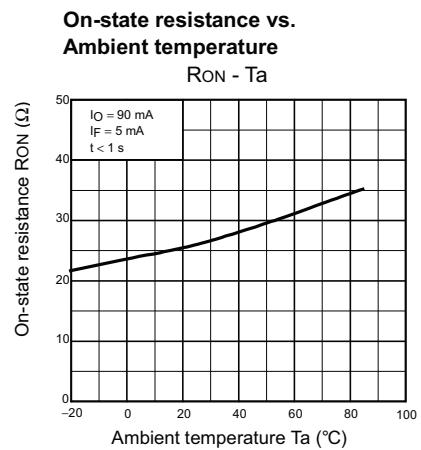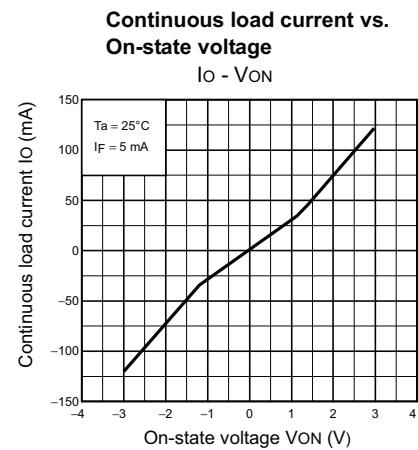




■ Engineering Data
G3VM-355J (continued)
Characteristics; SPST-NC

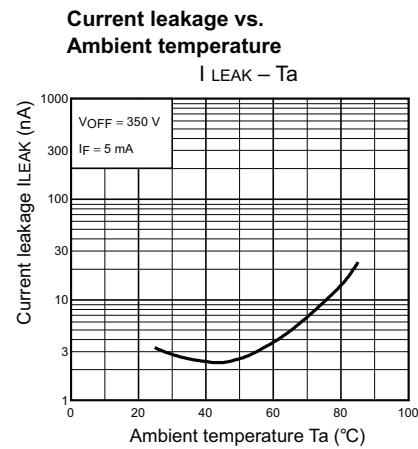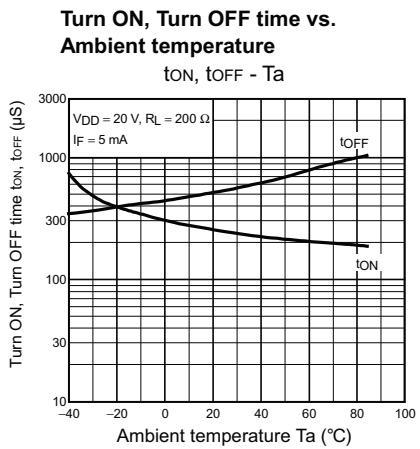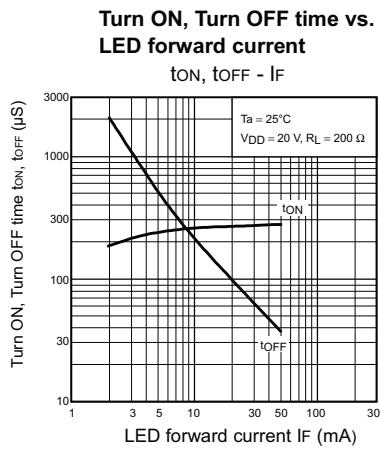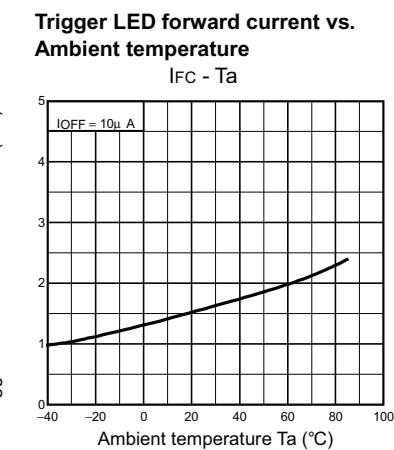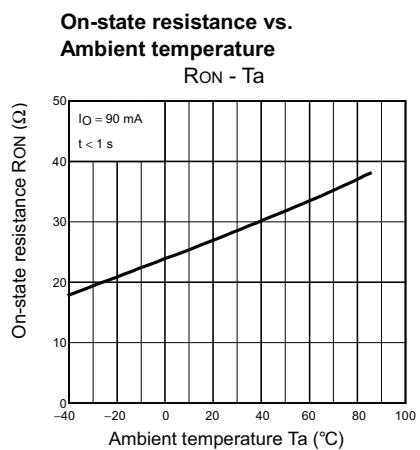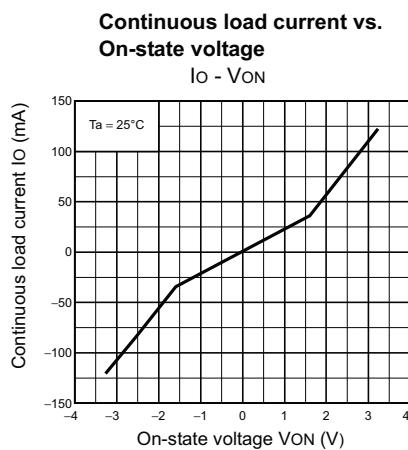







■ Engineering Data

G3VM-355JR







Common Characteristics; SPST-NO / SPST-NC

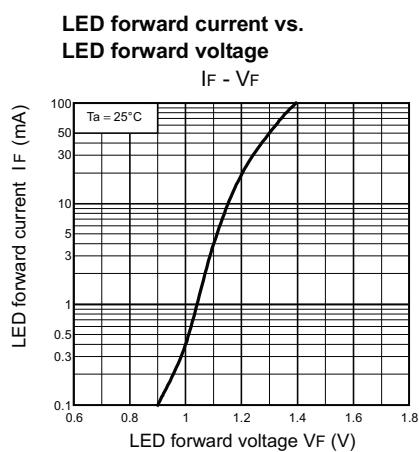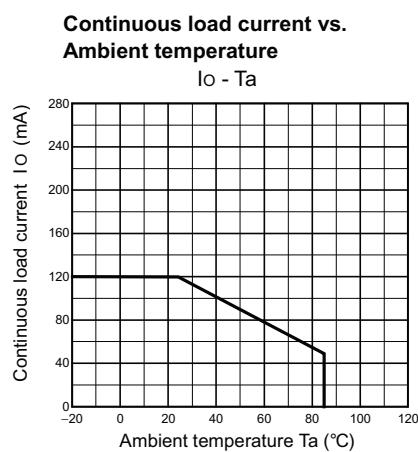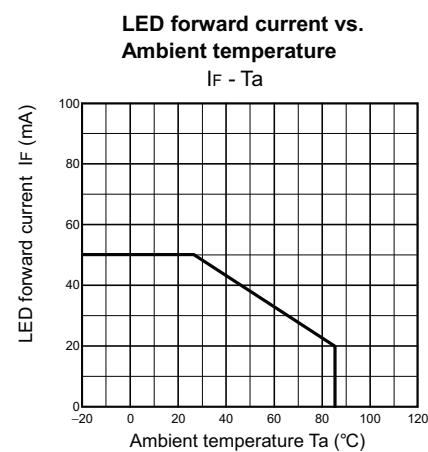


Characteristics; SPST-NO

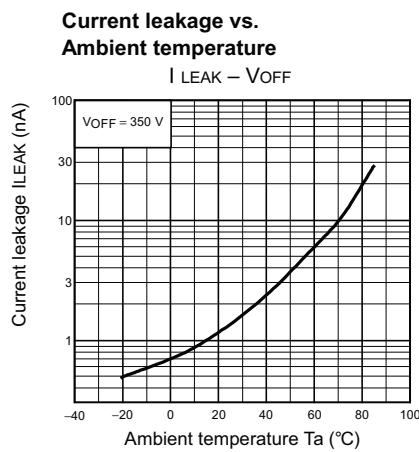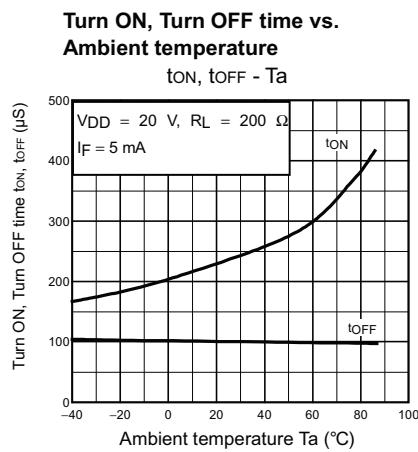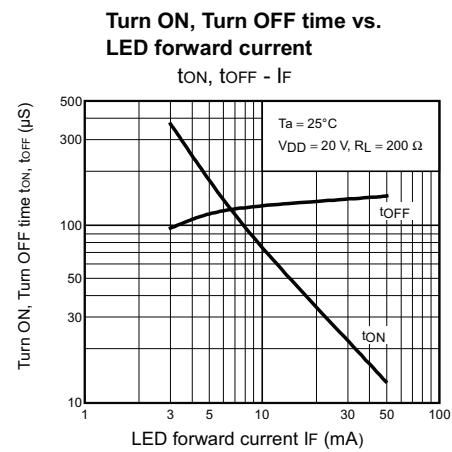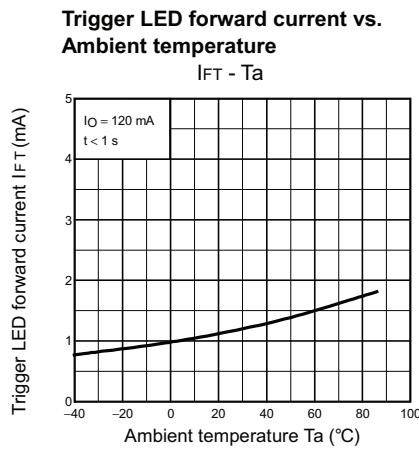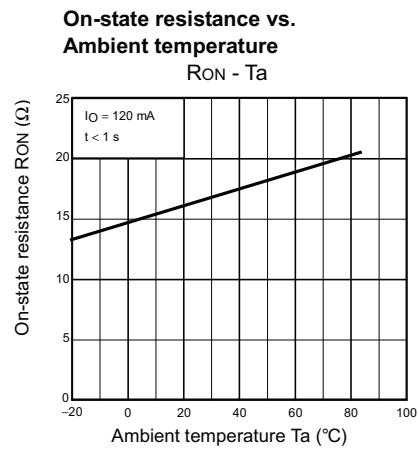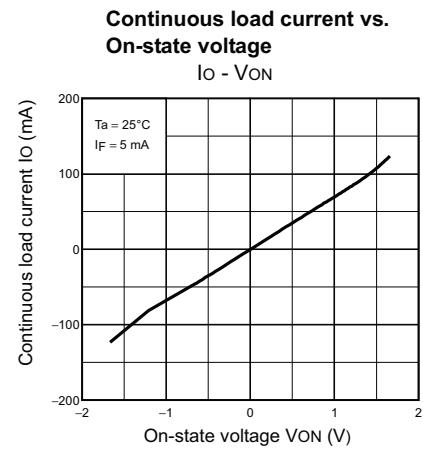

■ Engineering Data
G3VM-355JR (continued)
Characteristics; SPST-NC

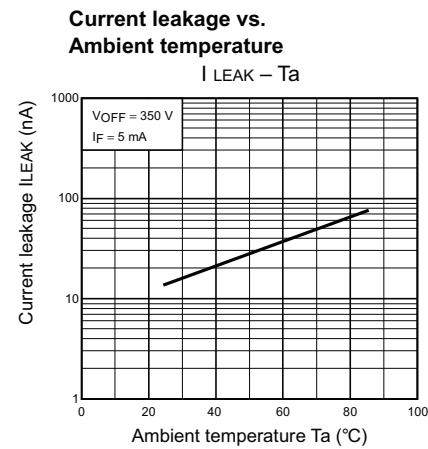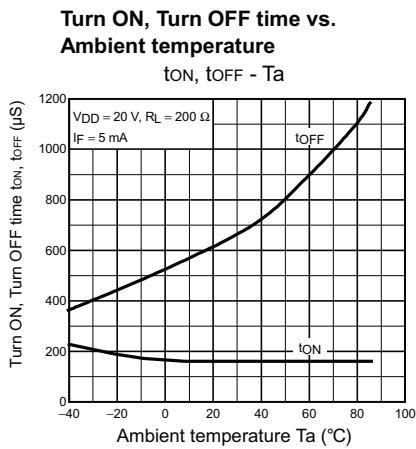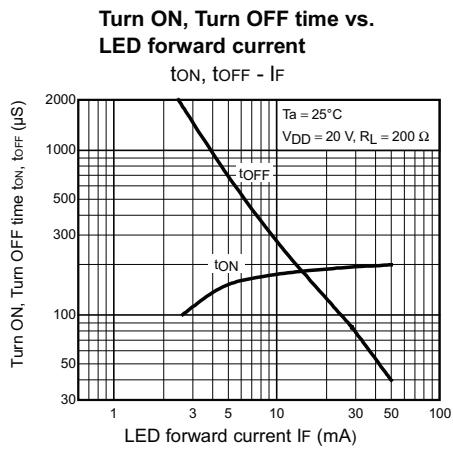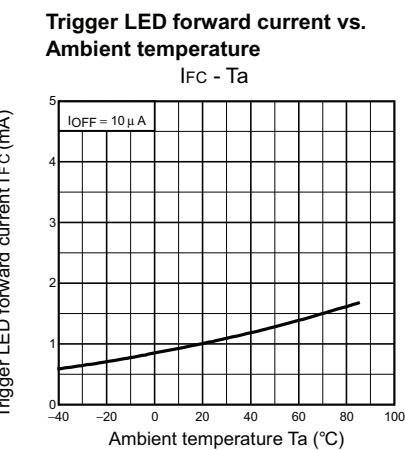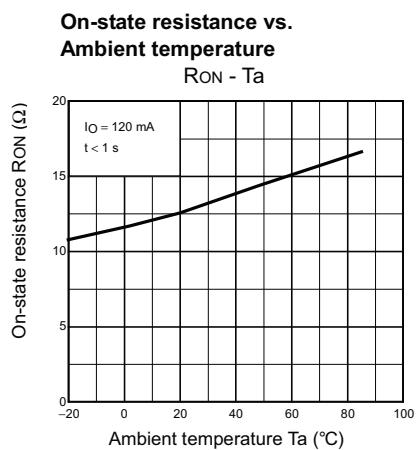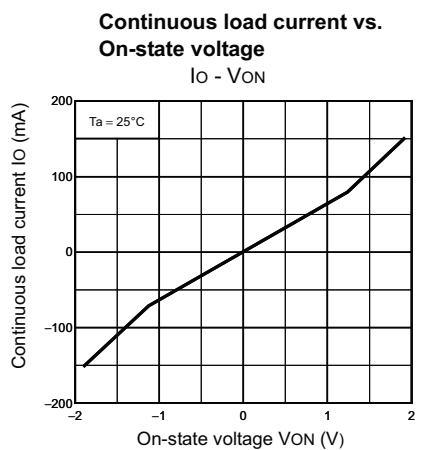

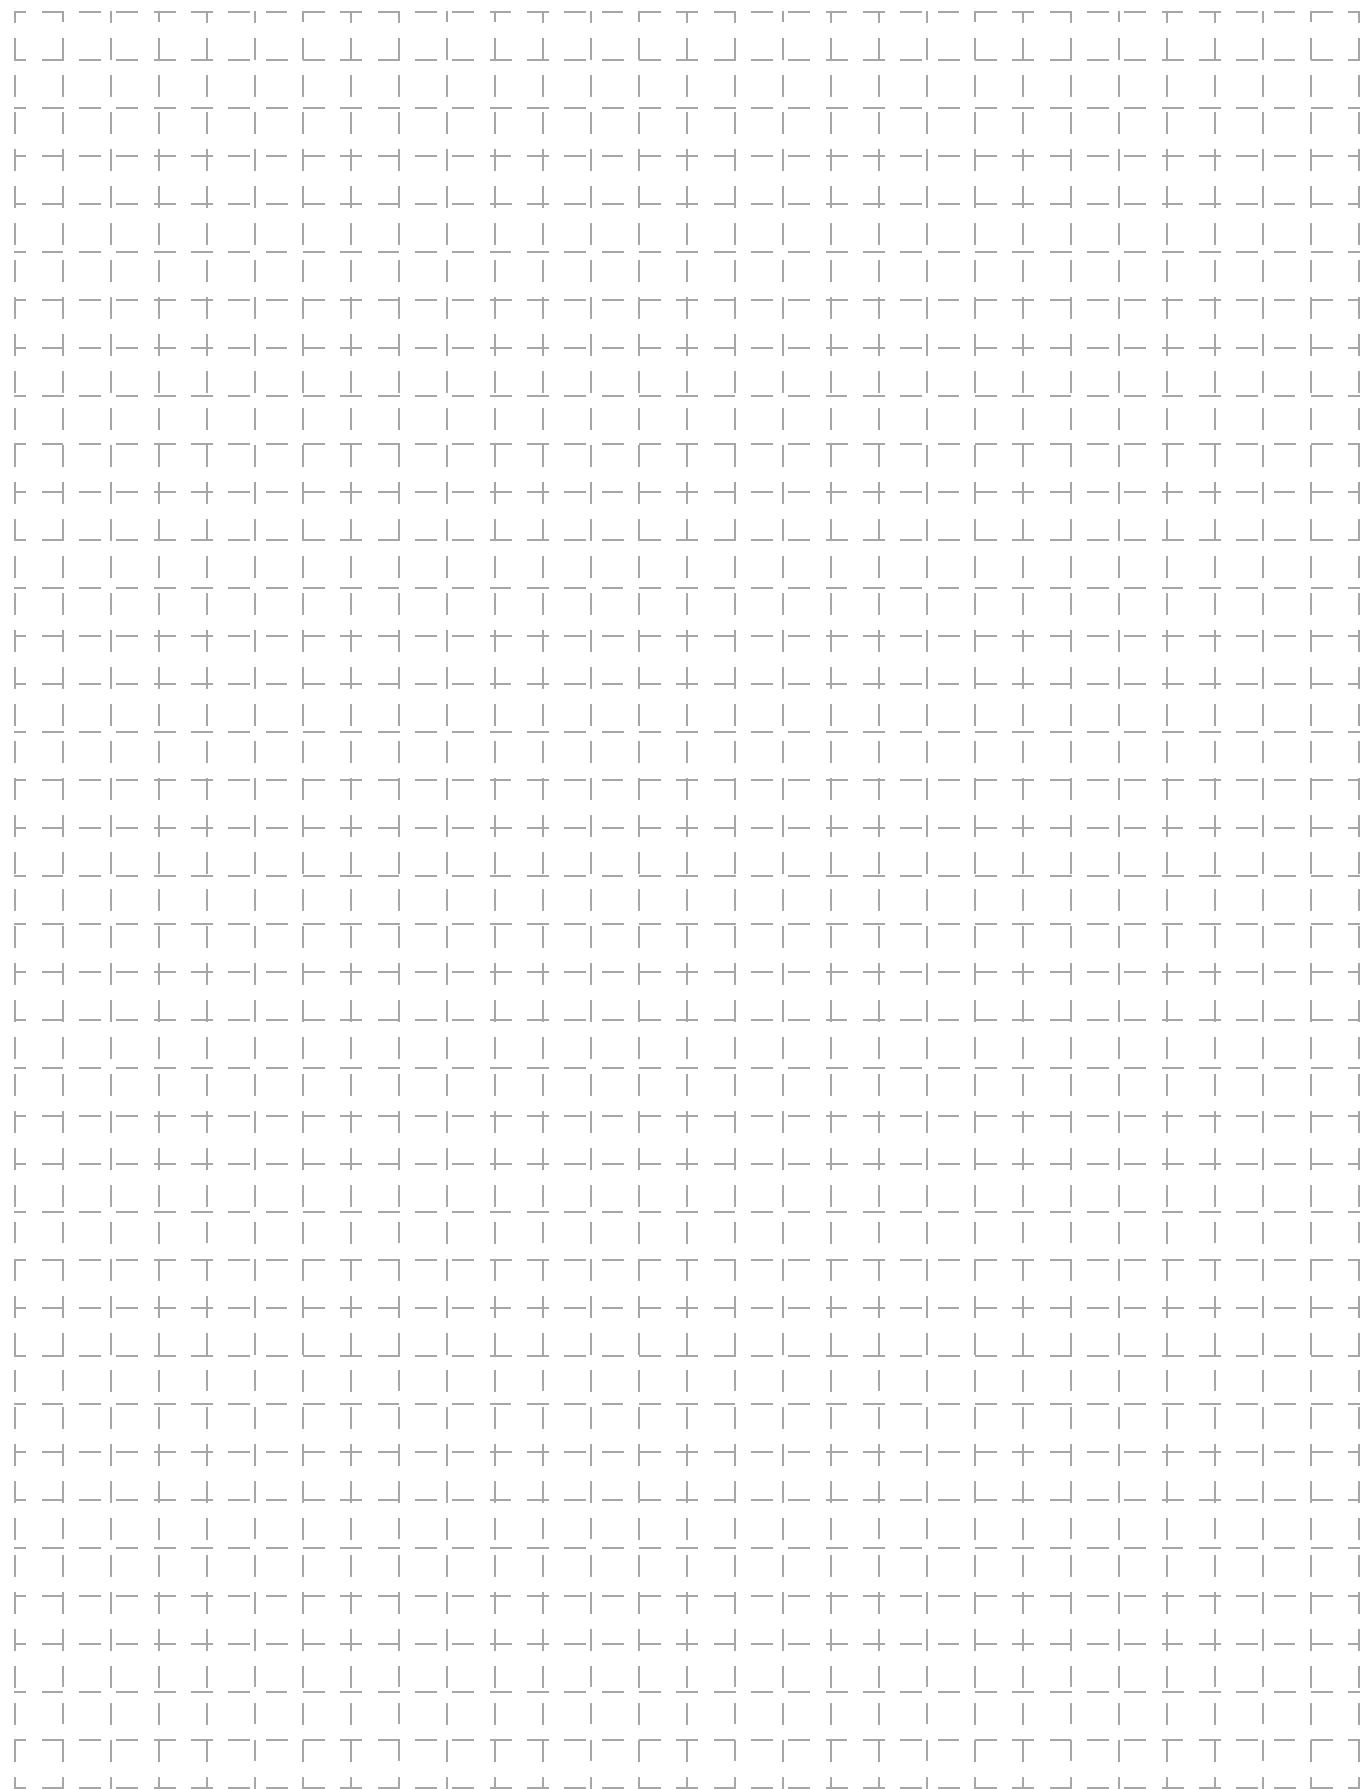

All sales are subject to Omron Electronic Components LLC standard terms and conditions of sale, which can be found at http://www.components.omron.com/components/web/webfiles.nsf/sales_terms.html

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.



**OMRON ELECTRONIC
COMPONENTS LLC**

55 E. Commerce Drive, Suite B
Schaumburg, IL 60173

847-882-2288

Cat. No. X302-E-1

12/10

Specifications subject to change without notice

OMRON ON-LINE

Global - <http://www.omron.com>
USA - <http://www.components.omron.com>

Printed in USA