

Features

- Small footprint size (0805) and low profile for space-constrained mobile applications
- Ultra-low resistance
- Symmetrical design
- Surface mount packaging for automated assembly
- RoHS compliant* and halogen free**
- Agency recognition: c 🕄 us

Applications

- USB port protection USB 2.0, 3.0 & OTG
- HDMI 1.4 Source protection
- PC motherboards Plug & Play protection
- Mobile phones Battery & port protection
- PDAs / digital cameras
- Bluetooth® earphone power protection
- Game console port protection

MF-PSML Series - Low Ohmic PTC Resettable Fuses

Electrical Characteristics

	V max.	I max.	l _{hold}	I _{trip}	Resistance		Max. Time To Trip		Tripped Power Dissipation
Model Volts			Amperes at 23 °C		Ohms at 23 °C		Amperes at 23 °C	Seconds at 23 °C	Watts at 23 °C
			Hold	Trip	R _{Min} .	R _{1Max.}			Тур.
MF-PSML075	6	50	0.75	1.50	0.020	0.300	8.00	0.3	0.6
MF-PSML110	6	50	1.10	1.80	0.0175	0.130	8.00	0.3	0.6
MF-PSML150	6	50	1.50	3.00	0.015	0.065	8.00	0.5	0.6
MF-PSML175	6	50	1.75	3.50	0.005	0.055	8.00	0.6	0.6
MF-PSML200	6	50	2.00	4.00	0.005	0.045	8.00	1.0	0.6
MF-PSML260	6	50	2.60	5.00	0.003	0.035	8.00	4.0	0.6
MF-PSML300	6	50	3.00	6.00	0.003	0.030	8.00	5.0	0.6
MF-PSML350	6	50	3.50	7.00	0.003	0.025	8.00	5.0	0.6

Environmental Characteristics

Operating Temperature	40 °C to +85 °C	
Storage Condition		
Before Opening	+40 °C max. / 70 % RH max.	
After Opening		
	Consumption within 4 weeks at floor condition +3	80 °C max. / 60 % RH max.
Passive Aging	+85 °C, 1000 hours	. ±10 % typical resistance change
Humidity Aging	+85 °C, 85 % R.H. 100 hours	. ±15 % typical resistance change
Thermal Shock	+85 °C to -40 °C, 20 times	. ±30 % typical resistance change
Solvent Resistance	MIL-STD-202, Method 215	. No change
Vibration	MIL-STD-883C, Method 2007.1,	. No change
	Condition A	ŭ
Moisture Sensitivity Level (MSL)	See Note	
ESD Classification - HBM	Class 6	

Test Procedures And Requirements

Resistance Time to Trip	30 min. at Ihold	. Rmin ≤ R ≤ R1max . T ≤ max. time to trip (seconds) . No trip . No arcing or burning . No arcing or burning
Solderability	. 245 °C ± 5 °C, 5 seconds	. 95 % min. coverage

 UL File Number
 E174545

 TÜV Certificate Number
 R 50302873



WARNING Cancer and Reproductive Harm - $\underline{www.P65Warnings.ca.gov}$

- * RoHS Directive 2002/95/EC Jan. 27, 2003 including annex and RoHS Recast 2011/65/EU June 8, 2011.
- **Bourns considers a product to be "halogen free" if (a) the Bromine (Br) content is 900 ppm or less; (b) the Chlorine (Cl) content is 900 ppm or less; and (c) the total Bromine (Br) and Chlorine (Cl) content is 1500 ppm or less.

Specifications are subject to change without notice.


Users should verify actual device performance in their specific applications.

MF-PSML Series - Low Ohmic PTC Resettable Fuses

BOURNS

Product Dimensions

Model	Α		В		С		D	E	
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Min.	Max.
MF-PSML075									
MF-PSML110]								
MF-PSML150	$\frac{2.00}{(0.079)}$	2.30 (0.091)	$\frac{1.20}{(0.047)}$	1.50 (0.059)	0.30 (0.012)	0.60 (0.024)	$\frac{0.20}{(0.008)}$	$\frac{0.05}{(0.002)}$	0.45 (0.018)
MF-PSML175	(0.079)	(0.091)	(0.047)	(0.059)	(0.012)	(0.024)	(0.000)	(0.002)	(0.010)
MF-PSML200									
MF-PSML260									
MF-PSML300	$\frac{2.00}{(0.079)}$	$\frac{2.30}{(0.091)}$	$\frac{1.20}{(0.047)}$	1.50 (0.059)	0.45 (0.018)	0.80 (0.031)	$\frac{0.20}{(0.008)}$	$\frac{0.05}{(0.002)}$	0.45 (0.018)
MF-PSML350	(0.079)	(0.091)	(0.047)	(0.059)	(0.018)	(0.031)	(0.008)	(0.002)	(0.018)

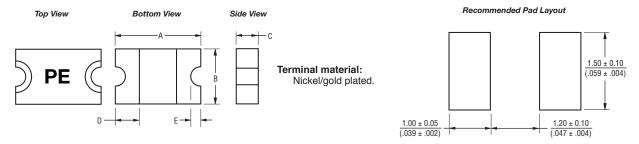


Packaging Specifications

MF-PSML075 \sim MF-PSML200 = 6000 pcs. per reel MF-PSML260 \sim MF-PSML350 = 4500 pcs. per reel

Thermal Derating Table - Ihold (Amps)

Model	Ambient Operating Temperature									
	-40 °C	-20 °C	0 °C	23 °C	40 °C	50 °C	60 °C	70 °C	85 °C	
MF-PSML075	1.24	1.07	0.94	0.75	0.62	0.54	0.47	0.37	0.23	
MF-PSML110	1.93	1.65	1.37	1.10	0.83	0.69	0.55	0.41	0.31	
MF-PSML150	2.37	2.07	1.80	1.50	1.25	1.08	0.93	0.74	0.50	
MF-PSML175	2.57	2.33	2.07	1.75	1.49	1.36	1.24	1.00	0.91	
MF-PSML200	2.94	2.66	2.36	2.00	1.70	1.55	1.42	1.14	1.04	
MF-PSML260	3.82	3.46	3.07	2.60	2.21	2.02	1.85	1.48	1.35	
MF-PSML300	4.41	3.99	3.54	3.00	2.55	2.33	2.13	1.71	1.56	
MF-PSML350	5.51	4.66	4.13	3.50	2.98	2.71	2.49	2.00	1.82	


Solder Reflow Recommendations

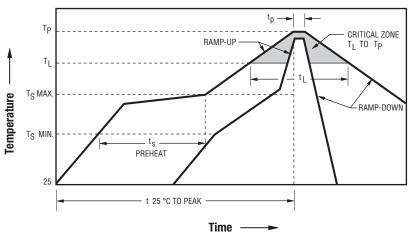

Notes

- MF-PSML models cannot be wave soldered or hand soldered. Please contact Bourns for soldering recommendations.
- All temperatures refer to topside of the package, measured on the package body surface.
- If reflow temperatures exceed the recommended profile, devices may not meet the published specifications.
- · Compatible with Pb and Pb-free solder reflow profiles.
- Excess solder may cause a short circuit, especially during hand soldering. Please refer to the Multifuse® Polymer PTC Soldering Recommendation guidelines.

Profile Feature	Pb-Free Assembly
Average Ramp-Up Rate (Ts _{max} to T _p)	3 °C / second max.
PREHEAT:	
Temperature Min. (Ts _{min})	150 °C
Temperature Max. (Ts _{max})	200 °C
Time (Ts _{min} to Ts _{max}) (ts)	60~180 seconds
TIME MAINTAINED ABOVE:	
Temperature (T _L)	217 °C
Time (t _L)	60~150 seconds
Peak Temperature (T _p)	260 °C
Time within 5 °C of Actual Peak Temperature (tp)	20~40 seconds
Ramp-Down Rate	6 °C / second max.
Time 25 °C to Peak Temperature	8 minutes max.



PART IDENTIFICATION: MF-PSML075 = PD MF-PSML110 = PE MF-PSML150 = PG MF-PSML200 = PJ MF-PSML200 = PJ MF-PSML300 = PP MF-PSML300 = PR MF-PSML300 = PS

BIWEEKLY DATE CODE WILL APPEAR ON THE PACKAGING LABEL: WEEK 1 AND 2 = A WEEK 51 AND 52 = Z

Typical Part Marking

BOURNS®

Asia-Pacific:

Tel: +886-2 2562-4117 Email: asiacus@bourns.com

Europe:

Tel: +36 88 885 877

Email: eurocus@bourns.com

The Americas:


Tel: +1-951 781-5500


Email: americus@bourns.com

www.bourns.com

MF-PSML Series Tape and Reel Specifications

	MF-PSML Series
Tape Dimensions	per EIA 481
W	8.0 ± 0.30
	(0.315 ± 0.012)
P_0	4.0 ± 0.10
	(0.157 ± 0.004)
P_1	$\frac{4.0 \pm 0.10}{(0.157 \pm 0.004)}$
	$\frac{(0.137 \pm 0.004)}{2.0 \pm 0.05}$
P ₂	$\frac{2.0 \pm 0.03}{(0.079 \pm 0.002)}$
۸-	1.70 ± 0.10
<u>A₀</u>	(0.067 ± 0.004)
B ₀	2.45 ± 0.10
	(0.096 ± 0.004)
B ₁ max.	4.35 (0.171)
D_0	1.5 + 0.10/-0.0
	$\overline{(0.059 + 0.004/-0)}$
F	$\frac{3.5 \pm 0.05}{(0.100 \pm 0.000)}$
<u>E</u> 1	$\frac{1.73 \pm 0.10}{(0.069 \pm 0.004)}$
E ₂ min.	$\frac{6.25}{(0.246)}$
T max.	$\frac{0.6}{(0.024)}$
T ₁ max.	0.1 (0.004)
V (ME DOLU OTT ME DOLU OOO)	0.65 ± 0.10
K ₀ (MF-PSML075~MF-PSML200)	$\frac{1000 \pm 0.004}{(0.026 \pm 0.004)}$
K ₀ (MF-PSML260~MF-PSML350)	0.95 ± 0.10
K) (IVIF-F-SIVILZOU~IVIF-F-SIVILSSU)	(0.037 ± 0.004)
Leader min.	390_
	(15.35)
Trailer min.	<u>160</u> (6.30)
Reel Dimensions	(may)
A max.	
	(7.28) 50
N min.	$\frac{50}{(1.97)}$
W ₁	8.4 + 1.5/-0.0 (0.331 + 0.059/-0.0)
	(0.331 + 0.059/-0.0)
W ₂ max.	$\frac{14.4}{(0.567)}$

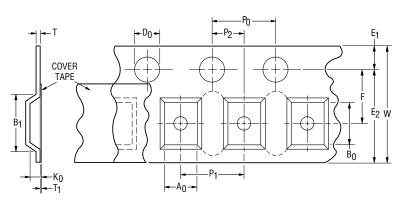



Bourns® Multifuse® PPTC Resettable Fuses

BOURNS

Application Notice

- Users are responsible for independent and adequate evaluation of Bourns® Multifuse® Polymer PTC devices in the user's
 application, including the PPTC device characteristics stated in the applicable data sheet.
- Polymer PTC devices must not be allowed to operate beyond their stated maximum ratings. Operation in excess of such
 maximum ratings could result in damage to the PTC device and possibly lead to electrical arcing and/or fire. Circuits with
 inductance may generate a voltage above the rated voltage of the polymer PTC device and should be thoroughly evaluated
 within the user's application during the PTC selection and qualification process.
- Polymer PTC devices are intended to protect against adverse effects of temporary overcurrent or overtemperature
 conditions up to rated limits and are not intended to serve as protective devices where overcurrent or overvoltage conditions
 are expected to be repetitive or prolonged.
- In normal operation, polymer PTC devices experience thermal expansion under fault conditions. Thus, a polymer PTC
 device must be protected against mechanical stress, and must be given adequate clearance within the user's application to
 accommodate such thermal expansion. Rigid potting materials or fixed housings or coverings that do not provide adequate
 clearance should be thoroughly examined and tested by the user, as they may result in the malfunction of polymer PTC
 devices if the thermal expansion is inhibited.
- Exposure to lubricants, silicon-based oils, solvents, gels, electrolytes, acids, and other related or similar materials may adversely affect the performance of polymer PTC devices.
- Aggressive solvents may adversely affect the performance of polymer PTC devices. Conformal coating, encapsulating, potting, molding, and sealing materials may contain aggressive solvents including but not limited to xylene and toluene, which are known to cause adverse effects on the performance of polymer PTCs. Such aggressive solvents must be thoroughly cured or baked to ensure their complete removal from polymer PTCs to minimize the possible adverse effect on the device.
- Recommended storage conditions should be followed at all times. Such conditions can be found on the applicable data sheet and on the Multifuse® Polymer PTC Moisture/Reflow Sensitivity Classification (MSL) note: https://www.bourns.com/docs/RoHS-MSL/msl mf.pdf

Legal Disclaimer Notice

BOURNS®

This legal disclaimer applies to purchasers and users of Bourns® products manufactured by or on behalf of Bourns, Inc. and its affiliates (collectively, "Bourns").

Unless otherwise expressly indicated in writing, Bourns® products and data sheets relating thereto are subject to change without notice. Users should check for and obtain the latest relevant information and verify that such information is current and complete before placing orders for Bourns® products.

The characteristics and parameters of a Bourns® product set forth in its data sheet are based on laboratory conditions, and statements regarding the suitability of products for certain types of applications are based on Bourns' knowledge of typical requirements in generic applications. The characteristics and parameters of a Bourns® product in a user application may vary from the data sheet characteristics and parameters due to (i) the combination of the Bourns® product with other components in the user's application, or (ii) the environment of the user application itself. The characteristics and parameters of a Bourns® product also can and do vary in different applications and actual performance may vary over time. Users should always verify the actual performance of the Bourns® product in their specific devices and applications, and make their own independent judgments regarding the amount of additional test margin to design into their device or application to compensate for differences between laboratory and real world conditions.

Unless Bourns has explicitly designated an individual Bourns® product as meeting the requirements of a particular industry standard (e.g., ISO/TS 16949) or a particular qualification (e.g., UL listed or recognized), Bourns is not responsible for any failure of an individual Bourns® product to meet the requirements of such industry standard or particular qualification. Users of Bourns® products are responsible for ensuring compliance with safety-related requirements and standards applicable to their devices or applications.

Bourns® products are not recommended, authorized or intended for use in nuclear, lifesaving, life-critical or life-sustaining applications, nor in any other applications where failure or malfunction may result in personal injury, death, or severe property or environmental damage. Unless expressly and specifically approved in writing by two authorized Bourns representatives on a case-by-case basis, use of any Bourns® products in such unauthorized applications might not be safe and thus is at the user's sole risk. Life-critical applications include devices identified by the U.S. Food and Drug Administration as Class III devices and generally equivalent classifications outside of the United States.

Bourns expressly identifies those Bourns® standard products that are suitable for use in automotive applications on such products' data sheets in the section entitled "Applications." Unless expressly and specifically approved in writing by two authorized Bourns representatives on a case-by-case basis, use of any other Bourns® standard products in an automotive application might not be safe and thus is not recommended, authorized or intended and is at the user's sole risk. If Bourns expressly identifies a sub-category of automotive application in the data sheet for its standard products (such as infotainment or lighting), such identification means that Bourns has reviewed its standard product and has determined that if such Bourns® standard product is considered for potential use in automotive applications, it should only be used in such sub-category of automotive applications. Any reference to Bourns® standard product in the data sheet as compliant with the AEC-Q standard or "automotive grade" does not by itself mean that Bourns has approved such product for use in an automotive application.

Bourns® standard products are not tested to comply with United States Federal Aviation Administration standards generally or any other generally equivalent governmental organization standard applicable to products designed or manufactured for use in aircraft or space applications. Bourns expressly identifies Bourns® standard products that are suitable for use in aircraft or space applications on such products' data sheets in the section entitled "Applications." Unless expressly and specifically approved in writing by two authorized Bourns representatives on a case-by-case basis, use of any other Bourns® standard product in an aircraft or space application might not be safe and thus is not recommended, authorized or intended and is at the user's sole risk.

The use and level of testing applicable to Bourns® custom products shall be negotiated on a case-by-case basis by Bourns and the user for which such Bourns® custom products are specially designed. Absent a written agreement between Bourns and the user regarding the use and level of such testing, the above provisions applicable to Bourns® standard products shall also apply to such Bourns® custom products.

Users shall not sell, transfer, export or re-export any Bourns® products or technology for use in activities which involve the design, development, production, use or stockpiling of nuclear, chemical or biological weapons or missiles, nor shall they use Bourns® products or technology in any facility which engages in activities relating to such devices. The foregoing restrictions apply to all uses and applications that violate national or international prohibitions, including embargos or international regulations. Further, Bourns® products and Bourns technology and technical data may not under any circumstance be exported or re-exported to countries subject to international sanctions or embargoes. Bourns® products may not, without prior authorization from Bourns and/or the U.S. Government, be resold, transferred, or re-exported to any party not eligible to receive U.S. commodities, software, and technical data.

To the maximum extent permitted by applicable law, Bourns disclaims (i) any and all liability for special, punitive, consequential, incidental or indirect damages or lost revenues or lost profits, and (ii) any and all implied warranties, including implied warranties of fitness for particular purpose, non-infringement and merchantability.

For your convenience, copies of this Legal Disclaimer Notice with German, Spanish, Japanese, Traditional Chinese and Simplified Chinese bilingual versions are available at:

Web Page: http://www.bourns.com/legal/disclaimers-terms-and-policies

PDF: http://www.bourns.com/docs/Legal/disclaimer.pdf