

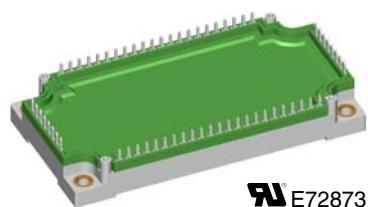


Converter - Brake - Inverter Module (CBI3)

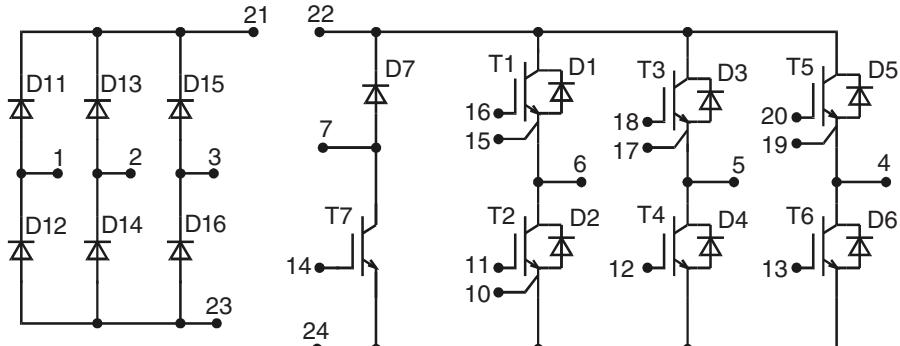

See outline drawing for pin arrangement

Preliminary data



Three Phase Rectifier	Brake Chopper	Three Phase Inverter
$V_{RRM} = 1600 \text{ V}$	$V_{CES} = 600 \text{ V}$	$V_{CES} = 600 \text{ V}$
$I_{FAV} = 70 \text{ A}$	$I_{C25} = 50 \text{ A}$	$I_{C25} = 100 \text{ A}$
$I_{FSM} = 700 \text{ A}$	$V_{CE(sat)} = 2.0 \text{ V}$	$V_{CE(sat)} = 2.0 \text{ V}$

Input Rectifier D11 - D16

Symbol	Conditions	Maximum Ratings		
V_{RRM}		1600	V	
I_{FAV}	$T_c = 80^\circ\text{C}$; sine 180°	50	A	
I_{DAVM}	$T_c = 80^\circ\text{C}$; rectangular; $d = 1/3$; bridge	140	A	
I_{FSM}	$T_{VJ} = 25^\circ\text{C}$; $t = 10 \text{ ms}$; sine 50 Hz	700	A	
P_{tot}	$T_c = 25^\circ\text{C}$	135	W	

Symbol	Conditions	Characteristic Values		
		($T_{VJ} = 25^\circ\text{C}$, unless otherwise specified)	min.	typ.
V_F	$I_F = 75 \text{ A}$; $T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$		1.2	1.4
			1.2	V
I_R	$V_R = V_{RRM}$, $T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$		0.8	0.05 mA
				mA
R_{thJC}	(per diode)			0.94 K/W

Application: AC motor drives with

- € Input from single or three phase grid
- € Three phase synchronous or asynchronous motor
- € Electric braking operation

Features

- € High level of integration - only one power semiconductor module required for the whole drive
- € NPT IGBT technology with low saturation voltage, low switching losses, high RBSOA and short circuit ruggedness
- € Epitaxial free wheeling diodes with Hiperfast and soft reverse recovery
- € Industry standard package with insulated copper base plate and soldering pins for PCB mounting
- € Temperature sense included

Output Inverter T1 - T6


Symbol	Conditions	Maximum Ratings		
V_{CES}	$T_{VJ} = 25^\circ\text{C}$ to 150°C	600		V
V_{GES}	Continuous	± 20		V
I_{C25}	$T_C = 25^\circ\text{C}$	100		A
I_{C80}	$T_C = 80^\circ\text{C}$	65		A
RBSOA	$V_{GE} = \pm 15\text{ V}$; $R_G = 15\text{ }\Omega$; $T_{VJ} = 125^\circ\text{C}$ Clamped inductive load; $L = 100\text{ }\mu\text{H}$	$I_{CM} = 150$		A
t_{sc} (SCSOA)	$V_{CE} = V_{CES}$; $V_{GE} = \pm 15\text{ V}$; $R_G = 15\text{ }\Omega$; $T_{VJ} = 125^\circ\text{C}$ non-repetitive	10	μs	
P_{tot}	$T_C = 25^\circ\text{C}$	320		W

Symbol	Conditions	Characteristic Values		
		($T_{VJ} = 25^\circ\text{C}$, unless otherwise specified)	min.	typ.
$V_{CE(sat)}$	$I_C = 75\text{ A}$; $V_{GE} = 15\text{ V}$; $T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$		2.0	2.5
			2.3	V
$V_{GE(th)}$	$I_C = 1.5\text{ mA}$; $V_{GE} = V_{CE}$	4.5		6.5
				V
I_{CES}	$V_{CE} = V_{CES}$; $V_{GE} = 0\text{ V}$; $T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$		1.5	1.4
				mA
I_{GES}	$V_{CE} = 0\text{ V}$; $V_{GE} = \pm 20\text{ V}$		200	200
				nA
$t_{d(on)}$	Inductive load, $T_{VJ} = 125^\circ\text{C}$ $V_{CE} = 300\text{ V}$; $I_C = 75\text{ A}$ $V_{GE} = \pm 15\text{ V}$; $R_G = 15\text{ }\Omega$	150		ns
t_r		60		ns
$t_{d(off)}$		450		ns
t_f		40		ns
E_{on}		4.0		mJ
E_{off}		3.3		mJ
C_{ies}	$V_{CE} = 25\text{ V}$; $V_{GE} = 0\text{ V}$; $f = 1\text{ MHz}$	4.2		nF
Q_{Gon}	$V_{CE} = 300\text{ V}$; $V_{GE} = 15\text{ V}$; $I_C = 100\text{ A}$	260		nC
R_{thJC}	(per IGBT)		0.39	K/W

Output Inverter D1 - D6

Symbol	Conditions	Maximum Ratings		
I_{F25}	$T_C = 25^\circ\text{C}$	140		A
I_{F80}	$T_C = 80^\circ\text{C}$	85		A

Symbol	Conditions	Characteristic Values		
		min.	typ.	max.
V_F	$I_F = 75\text{ A}$; $V_{GE} = 0\text{ V}$; $T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$	1.7	2.0	V
		1.2		V
I_{RM}	$I_F = 60\text{ A}$; $dI_F/dt = -500\text{ A}/\mu\text{s}$; $T_{VJ} = 125^\circ\text{C}$ $V_R = 300\text{ V}$; $V_{GE} = 0\text{ V}$	28		A
t_{rr}		100		ns
R_{thJC}	(per diode)		0.61	K/W

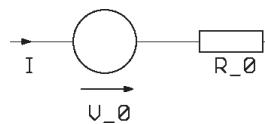Equivalent Circuits for Simulation**Conduction**

IGBT (typ. at $V_{GE} = 15\text{ V}$; $T_J = 125^\circ\text{C}$)
T1-T6

$$V_0 = 1.21\text{ V}; R_0 = 15\text{ m}\Omega$$

T7

$$V_0 = 1.06\text{ V}; R_0 = 36\text{ m}\Omega$$

Diode (typ. at $T_J = 125^\circ\text{C}$)

D1-D6


$$V_0 = 1.1\text{ V}; R_0 = 2\text{ m}\Omega$$

D7

$$V_0 = 1.1\text{ V}; R_0 = 12\text{ m}\Omega$$

D11-D16

$$V_0 = 0.85\text{ V}; R_0 = 5\text{ m}\Omega$$

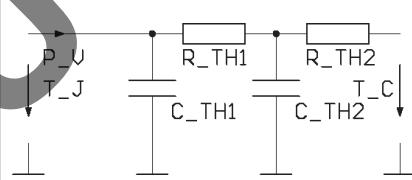Thermal Response

IGBT (typ.)

T1-T6

$$C_{th1} = 0.177\text{ J/K}; R_{th1} = 0.293\text{ K/W}$$

$$C_{th2} = 1.228\text{ J/K}; R_{th2} = 0.097\text{ K/W}$$

T7

$$C_{th1} = 0.088\text{ J/K}; R_{th1} = 0.583\text{ K/W}$$

$$C_{th2} = 0.799\text{ J/K}; R_{th2} = 0.167\text{ K/W}$$

Diode (typ.)

D1-D6

$$C_{th1} = 0.138\text{ J/K}; R_{th1} = 0.48\text{ K/W}$$

$$C_{th2} = 0.957\text{ J/K}; R_{th2} = 0.13\text{ K/W}$$

D7

$$C_{th1} = 0.038\text{ J/K}; R_{th1} = 1.725\text{ K/W}$$

$$C_{th2} = 0.439\text{ J/K}; R_{th2} = 0.375\text{ K/W}$$

D11-D16

$$C_{th1} = 0.086\text{ J/K}; R_{th1} = 0.738\text{ K/W}$$

$$C_{th2} = 0.621\text{ J/K}; R_{th2} = 0.202\text{ K/W}$$

Brake Chopper T7

Symbol	Conditions	Maximum Ratings		
V_{CES}	$T_{VJ} = 25^\circ\text{C}$ to 150°C	600		V
V_{GES}	Continuous	± 20		V
I_{C25}	$T_C = 25^\circ\text{C}$	50		A
I_{C80}	$T_C = 80^\circ\text{C}$	35		A
RBSOA	$V_{GE} = \pm 15 \text{ V}$; $R_G = 33 \Omega$; $T_{VJ} = 125^\circ\text{C}$ Clamped inductive load; $L = 100 \mu\text{H}$	$I_{CM} = 60$ $V_{CEK} \leq V_{CES}$		A
t_{sc} (SCSOA)	$V_{CE} = V_{CES}$; $V_{GE} = \pm 15 \text{ V}$; $R_G = 33 \Omega$; $T_{VJ} = 125^\circ\text{C}$ non-repetitive	10	μs	
P_{tot}	$T_C = 25^\circ\text{C}$	165		W

Symbol	Conditions	Characteristic Values		
		($T_{VJ} = 25^\circ\text{C}$, unless otherwise specified)	min.	typ.
$V_{CE(sat)}$	$I_C = 35 \text{ A}$; $V_{GE} = 15 \text{ V}$; $T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$		2.0 2.3	2.5 V V
$V_{GE(th)}$	$I_C = 0.7 \text{ mA}$; $V_{GE} = V_{CE}$	4.5		6.5 V
I_{CES}	$V_{CE} = V_{CES}$; $V_{GE} = 0 \text{ V}$; $T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$		0.3	0.5 mA mA
I_{GES}	$V_{CE} = 0 \text{ V}$; $V_{GE} = \pm 20 \text{ V}$		200	nA
$t_{d(on)}$ t_r $t_{d(off)}$ t_f E_{on} E_{off}	Inductive load, $T_{VJ} = 125^\circ\text{C}$ $V_{CE} = 300 \text{ V}$; $I_C = 35 \text{ A}$ $V_{GE} = \pm 15 \text{ V}$; $R_G = 33 \Omega$		50 50 270 40 1.63 1.17	ns ns ns ns mJ mJ
C_{ies}			1.6	nF
Q_{Gon}			94	nC
R_{thJC}			0.75	K/W

Brake Chopper D7

Symbol	Conditions	Maximum Ratings		
V_{RRM}	$T_{VJ} = 25^\circ\text{C}$ to 150°C	600		V
I_{F25}	$T_C = 25^\circ\text{C}$	35		A
I_{F80}	$T_C = 80^\circ\text{C}$	24		A
Symbol	Conditions	Characteristic Values		
V_F	$I_F = 35 \text{ A}$; $T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$	min.	typ.	max.
		2.0 1.5	2.3 V V	
I_R	$V_R = V_{RRM}$; $T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$		0.1	mA mA
I_{RM} t_{rr}	$I_F = 15 \text{ A}$; $di_F/dt = -400 \text{ A}/\mu\text{s}$; $T_{VJ} = 125^\circ\text{C}$ $V_R = 300 \text{ V}$	13 90		A ns
R_{thJC}			2.1	K/W

IXYS reserves the right to change limits, test conditions and dimensions.

20070912a

Temperature Sensor NTC


Symbol	Conditions	Characteristic Values		
		min.	typ.	max.
R_{25} $B_{25/50}$	$T = 25^\circ\text{C}$	4.75	5.0 3375	5.25 k Ω K

Module


Symbol	Conditions	Maximum Ratings		
T_{VJ}	operating	-40...+125	°C	
T_{JM}		+150	°C	
T_{stg}		-40...+125	°C	
V_{ISOL}	$I_{ISOL} \leq 1 \text{ mA}; 50/60 \text{ Hz}$	2500	V~	
M_d	Mounting torque (M5)	3 - 6	Nm	

Symbol	Conditions	Characteristic Values		
		min.	typ.	max.
$R_{pin-chip}$		5	m Ω	
d_s	Creepage distance on surface	6	mm	
d_A	Strike distance in air	6	mm	
R_{thCH}	with heatsink compound	0.01	K/W	
Weight		300	g	9


Dimensions in mm (1 mm = 0.0394")

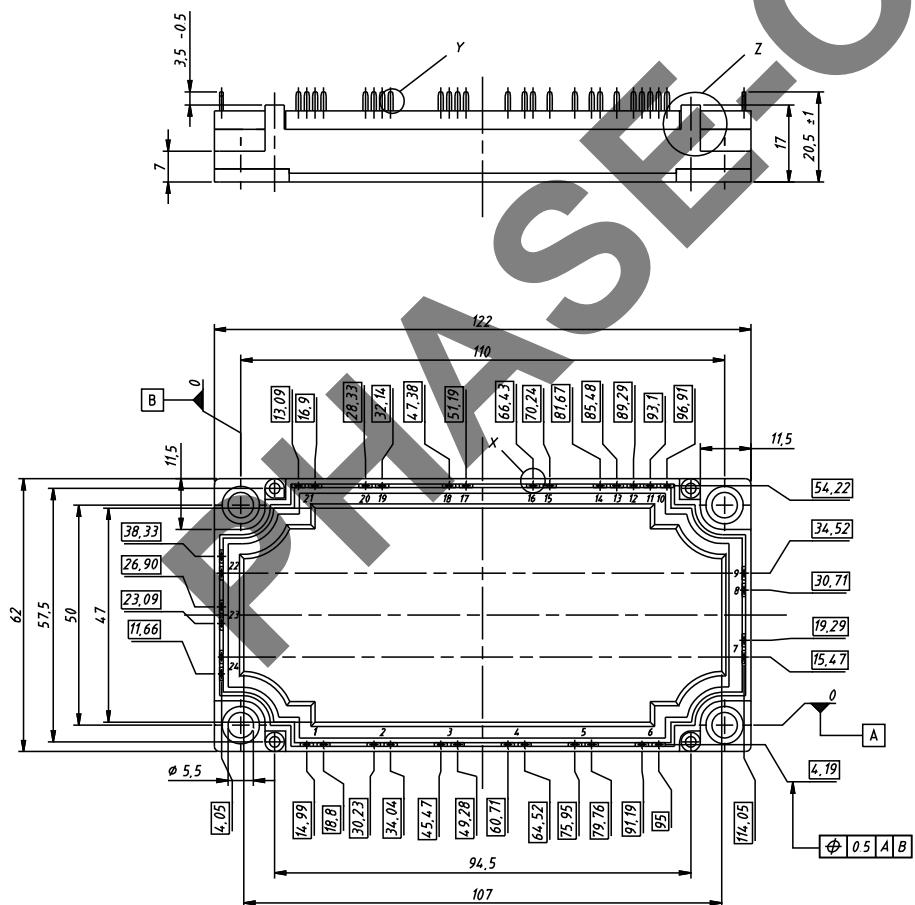

Detail Z

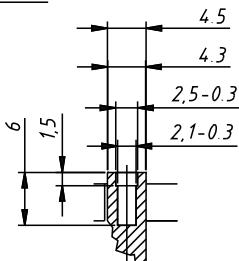

Detail X



Detail Y

