

# Schottky Diode

$V_{RRM}$  = 45 V  
 $I_{FAV}$  = 2x 30 A  
 $V_F$  = 0.58 V


High Performance Schottky Diode

Low Loss and Soft Recovery


Common Cathode

Part number

**DSSK60-0045A**

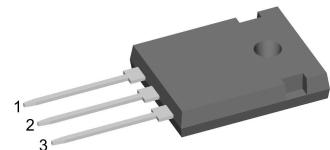

Backside: cathode

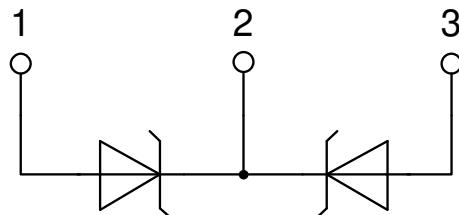

## Features / Advantages:

- Very low  $V_F$
- Extremely low switching losses
- Low  $I_{rm}$  values
- Improved thermal behaviour
- High reliability circuit operation
- Low voltage peaks for reduced protection circuits
- Low noise switching

## Applications:

- Rectifiers in switch mode power supplies (SMPS)
- Free wheeling diode in low voltage converters

## Package: TO-247

- Industry standard outline
- RoHS compliant
- Epoxy meets UL 94V-0

## Disclaimer Notice


Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics).

**Schottky**

Symbol	Definition	Conditions	Ratings			
			min.	typ.	max.	
$V_{RSM}$	max. non-repetitive reverse blocking voltage	$T_{VJ} = 25^\circ C$			45	V
$V_{RRM}$	max. repetitive reverse blocking voltage	$T_{VJ} = 25^\circ C$			45	V
$I_R$	reverse current, drain current	$V_R = 45 V$ $V_R = 45 V$	$T_{VJ} = 25^\circ C$ $T_{VJ} = 125^\circ C$		1 10	mA
$V_F$	forward voltage drop	$I_F = 30 A$ $I_F = 60 A$ $I_F = 30 A$ $I_F = 60 A$	$T_{VJ} = 25^\circ C$ $T_{VJ} = 125^\circ C$		0.70 0.83 0.58 0.73	V
$I_{FAV}$	average forward current	$T_C = 150^\circ C$ rectangular $d = 0.5$	$T_{VJ} = 175^\circ C$		30	A
$V_{F0}$ $r_F$	threshold voltage slope resistance } for power loss calculation only		$T_{VJ} = 175^\circ C$		0.37 4.9	V mΩ
$R_{thJC}$	thermal resistance junction to case				1.1	K/W
$R_{thCH}$	thermal resistance case to heatsink			0.25		K/W
$P_{tot}$	total power dissipation		$T_C = 25^\circ C$		135	W
$I_{FSM}$	max. forward surge current	$t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}; V_R = 0 V$	$T_{VJ} = 45^\circ C$		500	A
$C_J$	junction capacitance	$V_R = 5 V$ $f = 1 \text{ MHz}$	$T_{VJ} = 25^\circ C$		1.94	nF
$E_{AS}$	non-repetitive avalanche energy	$I_{AS} = 18 A$ $L = 180 \mu H$	$T_{VJ} = 25^\circ C$		46	mJ
$I_{AR}$	repetitive avalanche current	$V_A = 1.5 \cdot V_R$ typ. $f = 10 \text{ kHz}$			1.8	A


**Package TO-247**

Symbol	Definition	Conditions	min.	typ.	max.	Unit
$I_{RMS}$	<i>RMS current</i>	per terminal <sup>1)</sup>			70	A
$T_{VJ}$	<i>virtual junction temperature</i>		-55		175	°C
$T_{op}$	<i>operation temperature</i>		-55		150	°C
$T_{stg}$	<i>storage temperature</i>		-55		150	°C
<b>Weight</b>				6		g
$M_d$	<i>mounting torque</i>		0.8		1.2	Nm
$F_c$	<i>mounting force with clip</i>		20		120	N

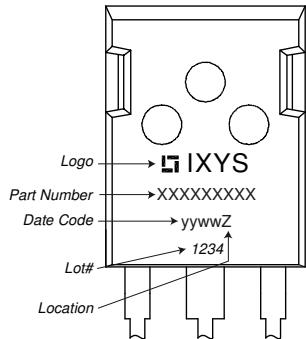**Product Marking**


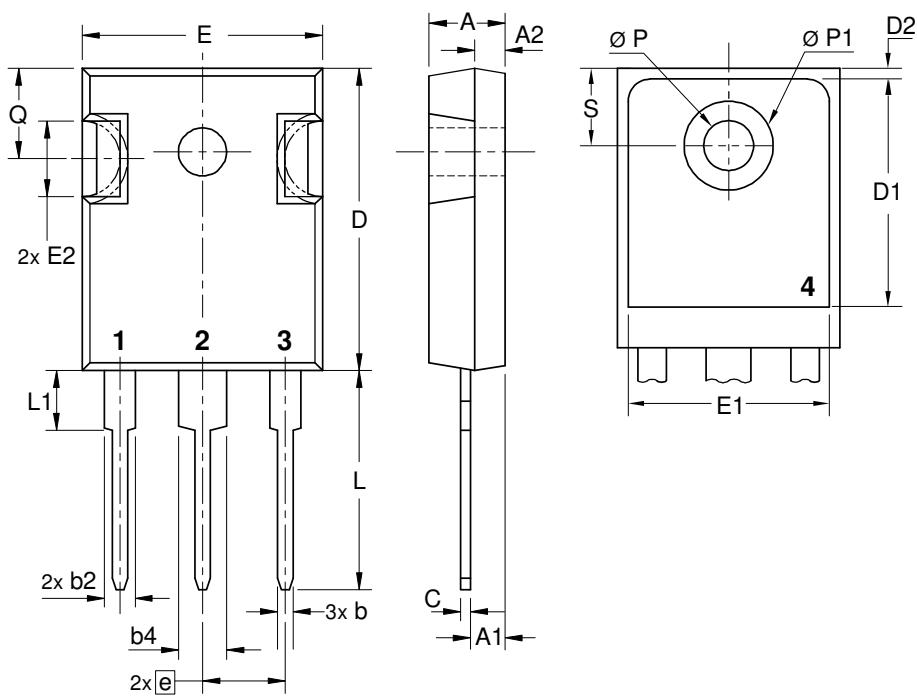
Ordering	Ordering Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	DSSK60-0045A	DSSK60-0045A	Tube	30	502510

**Equivalent Circuits for Simulation**
<sup>\*</sup>on die level

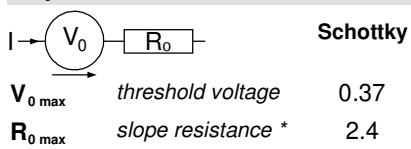
 $T_{VJ} = 175^\circ\text{C}$ 


V

mΩ

**Outlines TO-247**


Sym.	Inches min. max.	Millimeter min. max.
A	0.185 0.209	4.70 5.30
A1	0.087 0.102	2.21 2.59
A2	0.059 0.098	1.50 2.49
D	0.819 0.845	20.79 21.45
E	0.610 0.640	15.48 16.24
E2	0.170 0.216	4.31 5.48
e	0.215 BSC	5.46 BSC
L	0.780 0.800	19.80 20.30
L1	- 0.177	- 4.49
Ø P	0.140 0.144	3.55 3.65
Q	0.212 0.244	5.38 6.19
S	0.242 BSC	6.14 BSC
b	0.039 0.055	0.99 1.40
b2	0.065 0.094	1.65 2.39
b4	0.102 0.135	2.59 3.43
c	0.015 0.035	0.38 0.89
D1	0.515 -	13.07 -
D2	0.020 0.053	0.51 1.35
E1	0.530 -	13.45 -
Ø P1	- 0.29	- 7.39

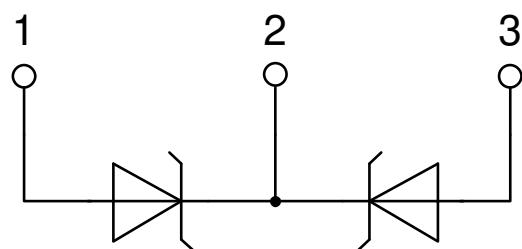

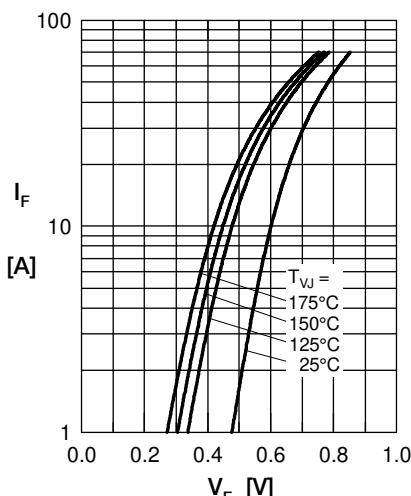
**Schottky**


Fig. 1 Max. forward voltage drop characteristics

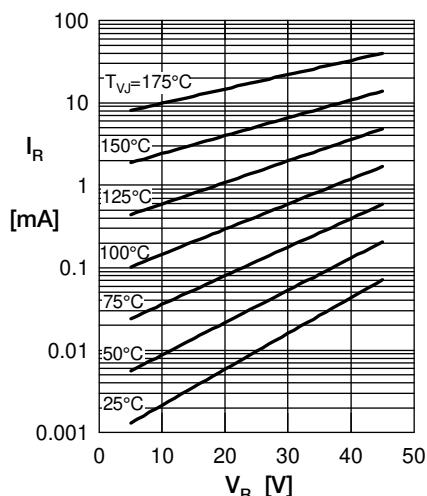


Fig. 2 Typ. reverse current  $I_R$  vs. reverse voltage  $V_R$

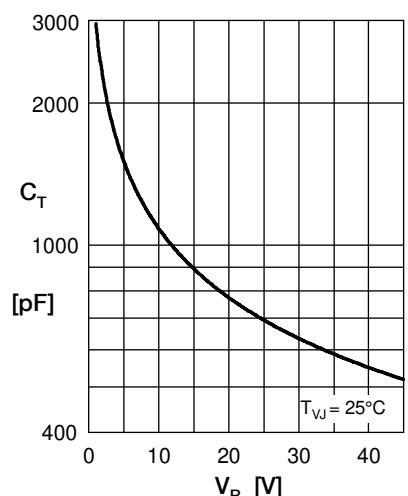


Fig. 3 Typ. junction capacitance  $C_T$  vs. reverse voltage  $V_R$

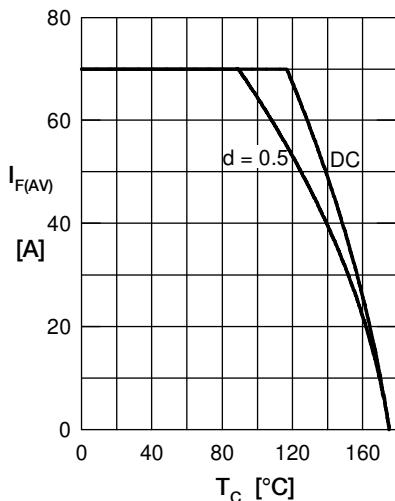


Fig. 4 Average forward current  $I_{F(AV)}$  vs. case temp.  $T_C$


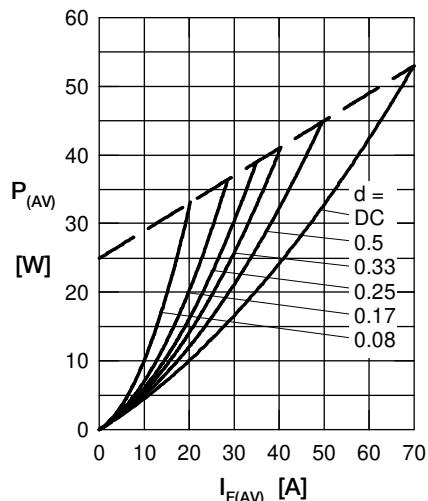


Fig. 5 Forward power loss characteristics

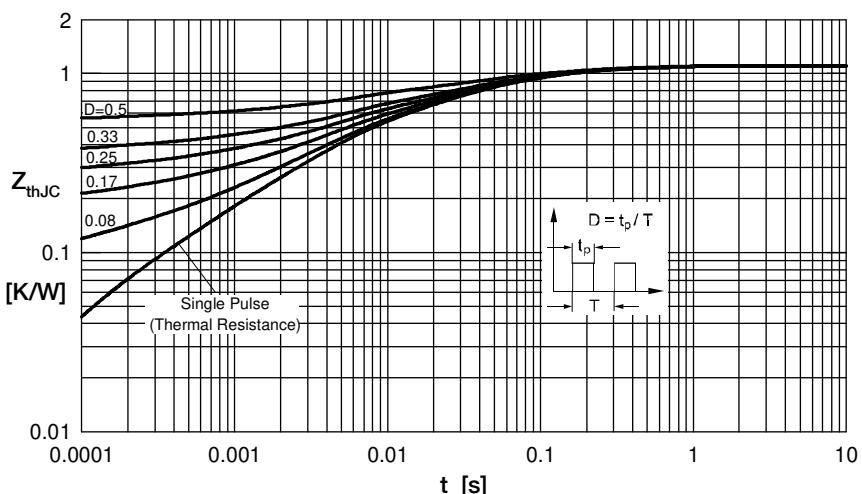

Note: All curves are per diode

Fig. 6 Transient thermal impedance junction to case at various duty cycles