

AXO[®]315




High performance ± 14 g MEMS accelerometer with digital interface

High performance and stability for precision navigation and positioning in severe environments

AXO[®]315 is a high performance, closed-loop, single-axis in-plane digital MEMS accelerometer which offers a cost-effective alternative to quartz accelerometers at a fraction of their size, weight and power consumption. With a 1 year composite bias repeatability of 1 mg under demanding temperature and vibrations conditions, it overpasses all commercially available MEMS accelerometers.

AXO[®]315 is the perfect candidate for integration into high performance Inertial Measurement Units (IMU) and Inertial Navigation Systems (INS) operating in highly vibrating environments, such as land, railway and air transportation.

The hermetic ceramic SMD package combined with a 24 bits SPI interface eases the integration of AXO[®]315 and reduces the BOM. The built-in self-test ensures initial verification of the sensor's integrity and continuous in-operation functionality test.

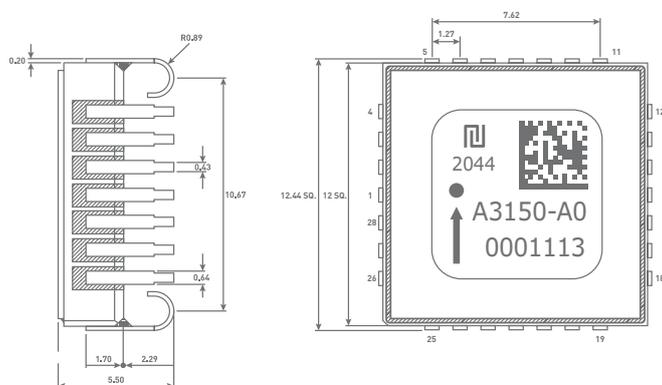

12 x 12 x 5.5 mm³, 1.4 g, J-Lead ceramic package

Key performances

- ± 14 g range, single-axis in-plane accelerometer
- 1 year composite bias repeatability: 1 mg
- 1 year composite scale factor repeatability: 600 ppm
- Vibration rejection: 20 $\mu\text{g}/\text{g}^2$
- Noise: 15 $\mu\text{g}/\sqrt{\text{Hz}}$
- Temperature range: from -55°C to $+105^\circ\text{C}$

Key features

- 24-bit digital SPI interface
- Initial and continuous self-test
- Factory-calibrated over temperature
- Hermetic ceramic SMD package
- Non classified under dual-use export control
- REACH and RoHS compliant

Applications

- INS for GNSS-assisted positioning and navigation of ground vehicles & trains
- AHRS (Attitude & Heading Reference System)
- MRU (Motion Reference Units)
- IMU for precision robotics and remotely operated vehicles
- Test instrumentation
- Oil drilling & surveying instrumentation



Key specifications

Parameter	Typ. value	Unit	Note
Range			
Acceleration range	±14	g	
Scale Factor			
1 year composite repeatability	600	ppm	
Non linearity	80	ppm	
Residual temperature error	± 400	ppm	Compensated
Bias			
1 year composite repeatability	1	mg	
Instability (Allan Variance)	4	µg	
Residual temperature error	± 0.5	mg	Compensated
Vibration rectification error (VRE)	20	µg/g ²	Under 4.12 g rms (10 to 2000Hz)
Bandwidth, noise and output signal			
Bandwidth	> 300	Hz	Customizable upon request
Velocity Random Walk	0.006	m/s/√h	
Noise spectral density	15	µg/√Hz	
Data rate	2500	Hz	User-configurable
Latency	1	ms	
Operating Conditions			
Operational vibrations	4.12	g rms	DO-160G standard, curve C
Operational shock	50 6	g ms	Half-sine
Survival shock	2000 0.3	g ms	
Operating temperature range	-55 to +105	°C	
Power and supply			
Power supply	5	V	
Current consumption	25	mA	

Sensors are factory calibrated and compensated for temperature effects to provide a high-accuracy digital output over the temperature range. Raw data output can also be chosen to enable compensations at the IMU or at the system level.

Specification subject to change without notice. 2022 © Tronic's Microsystems SA. All rights reserved. MCD019-D.

