

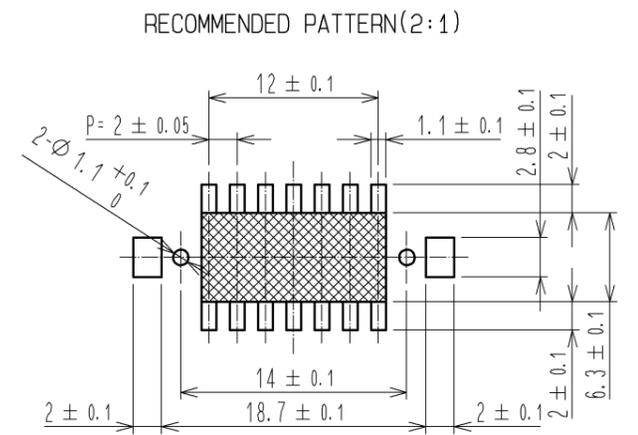
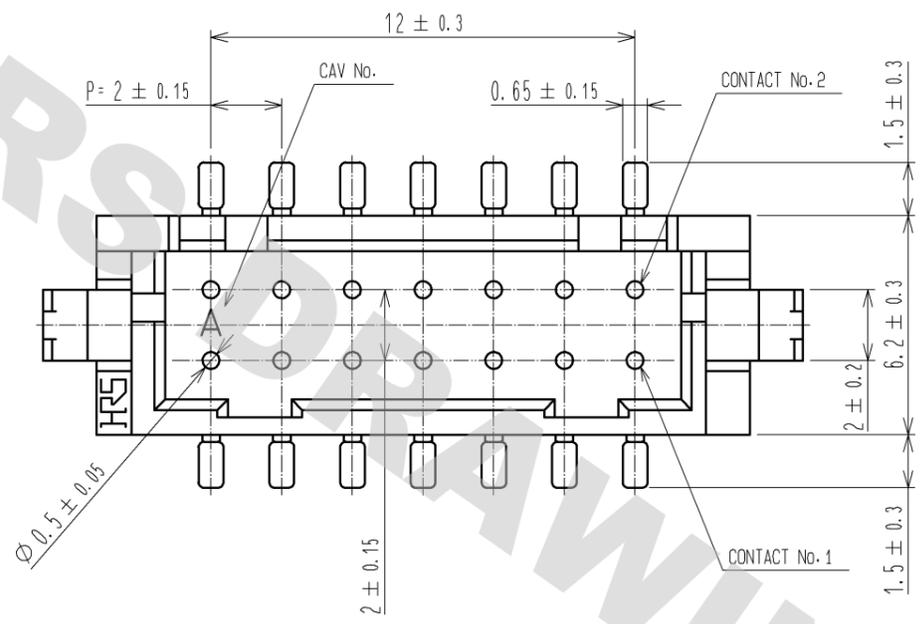
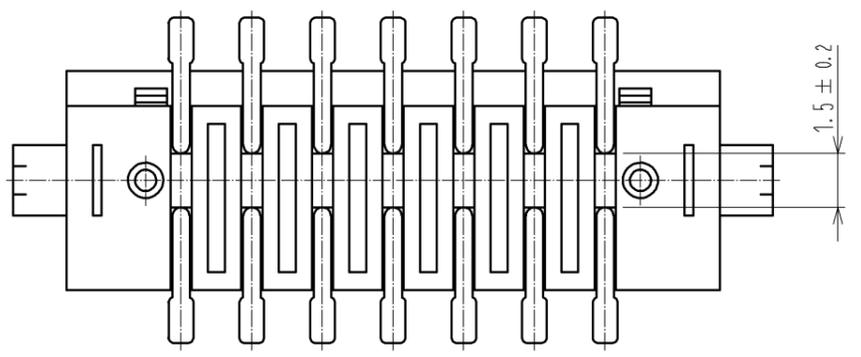


DRAWING FOR REFERENCE: This is subject to change without notice  
08/11/2012

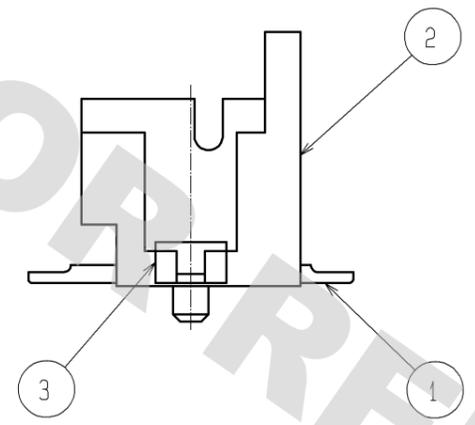


RECOMMENDED METAL MASK  
THICKNESS: 0.15-0.2mm  
OPENING RATIO: 100%

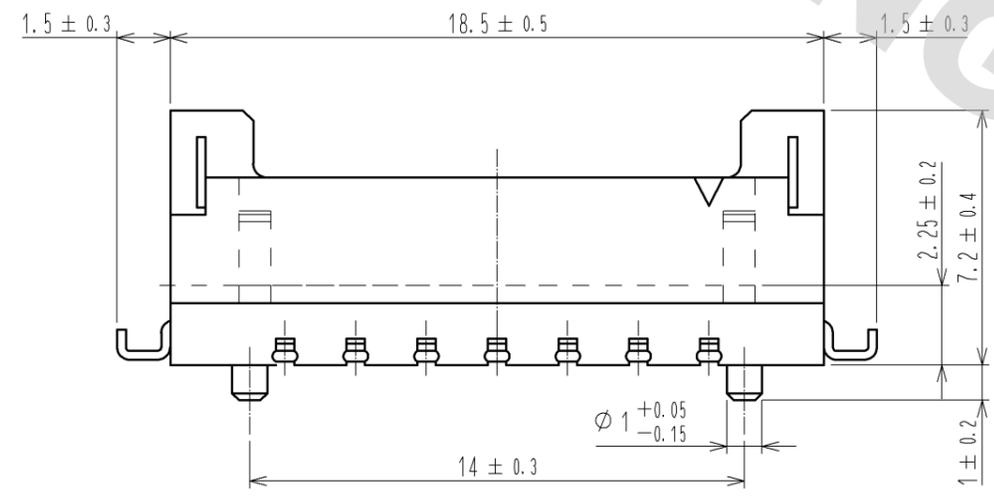

NOTE 1 LEAD CO-PLANALITY INCLUDE REINFORCED METAL FITTING SHALL BE 0.1mmMAX.  
2 WHEN A PART MARKED WITH HAS A PATTERN AND NO RESIST ON IT, USE CARE TO PREVENT THE CONNECTOR TERMINAL FROM CONTACTING IT.

3	BRASS	SURFACE:TIN PLATED 1µm min	7	PS	BLACK			
2	POLYAMIDE	BEIGE·UL94V-0	6	POLYESTER	CLEAR·COVER TAPE			
1	BRASS	SURFACE:TIN PLATED 1µm min	5	PS	EMBOSSED CARRIER TAPE·CLEAR			
		UNDER PLATING:NICKEL 0.5µm min	4	POLYAMIDE	CAP·BLACK			
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS			
UNITS mm		SCALE 5 : 1	COUNT 	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
APPROVED : TS. SAKATA			09.10.23	DRAWING NO.		EDC3-302050-01		
CHECKED : TS. FUKUSHIMA			09.10.23	PART NO.		DF11Z-14DP-2V(24)		
DESIGNED : TH. YOSHIZAWA			09.10.21	CODE NO.		CL543-2022-3-24		
DRAWN : TH. YOSHIZAWA			09.10.21			1/2		

DRAWING FOR REFERENCE: This is subject to change without notice  
08/11/2012

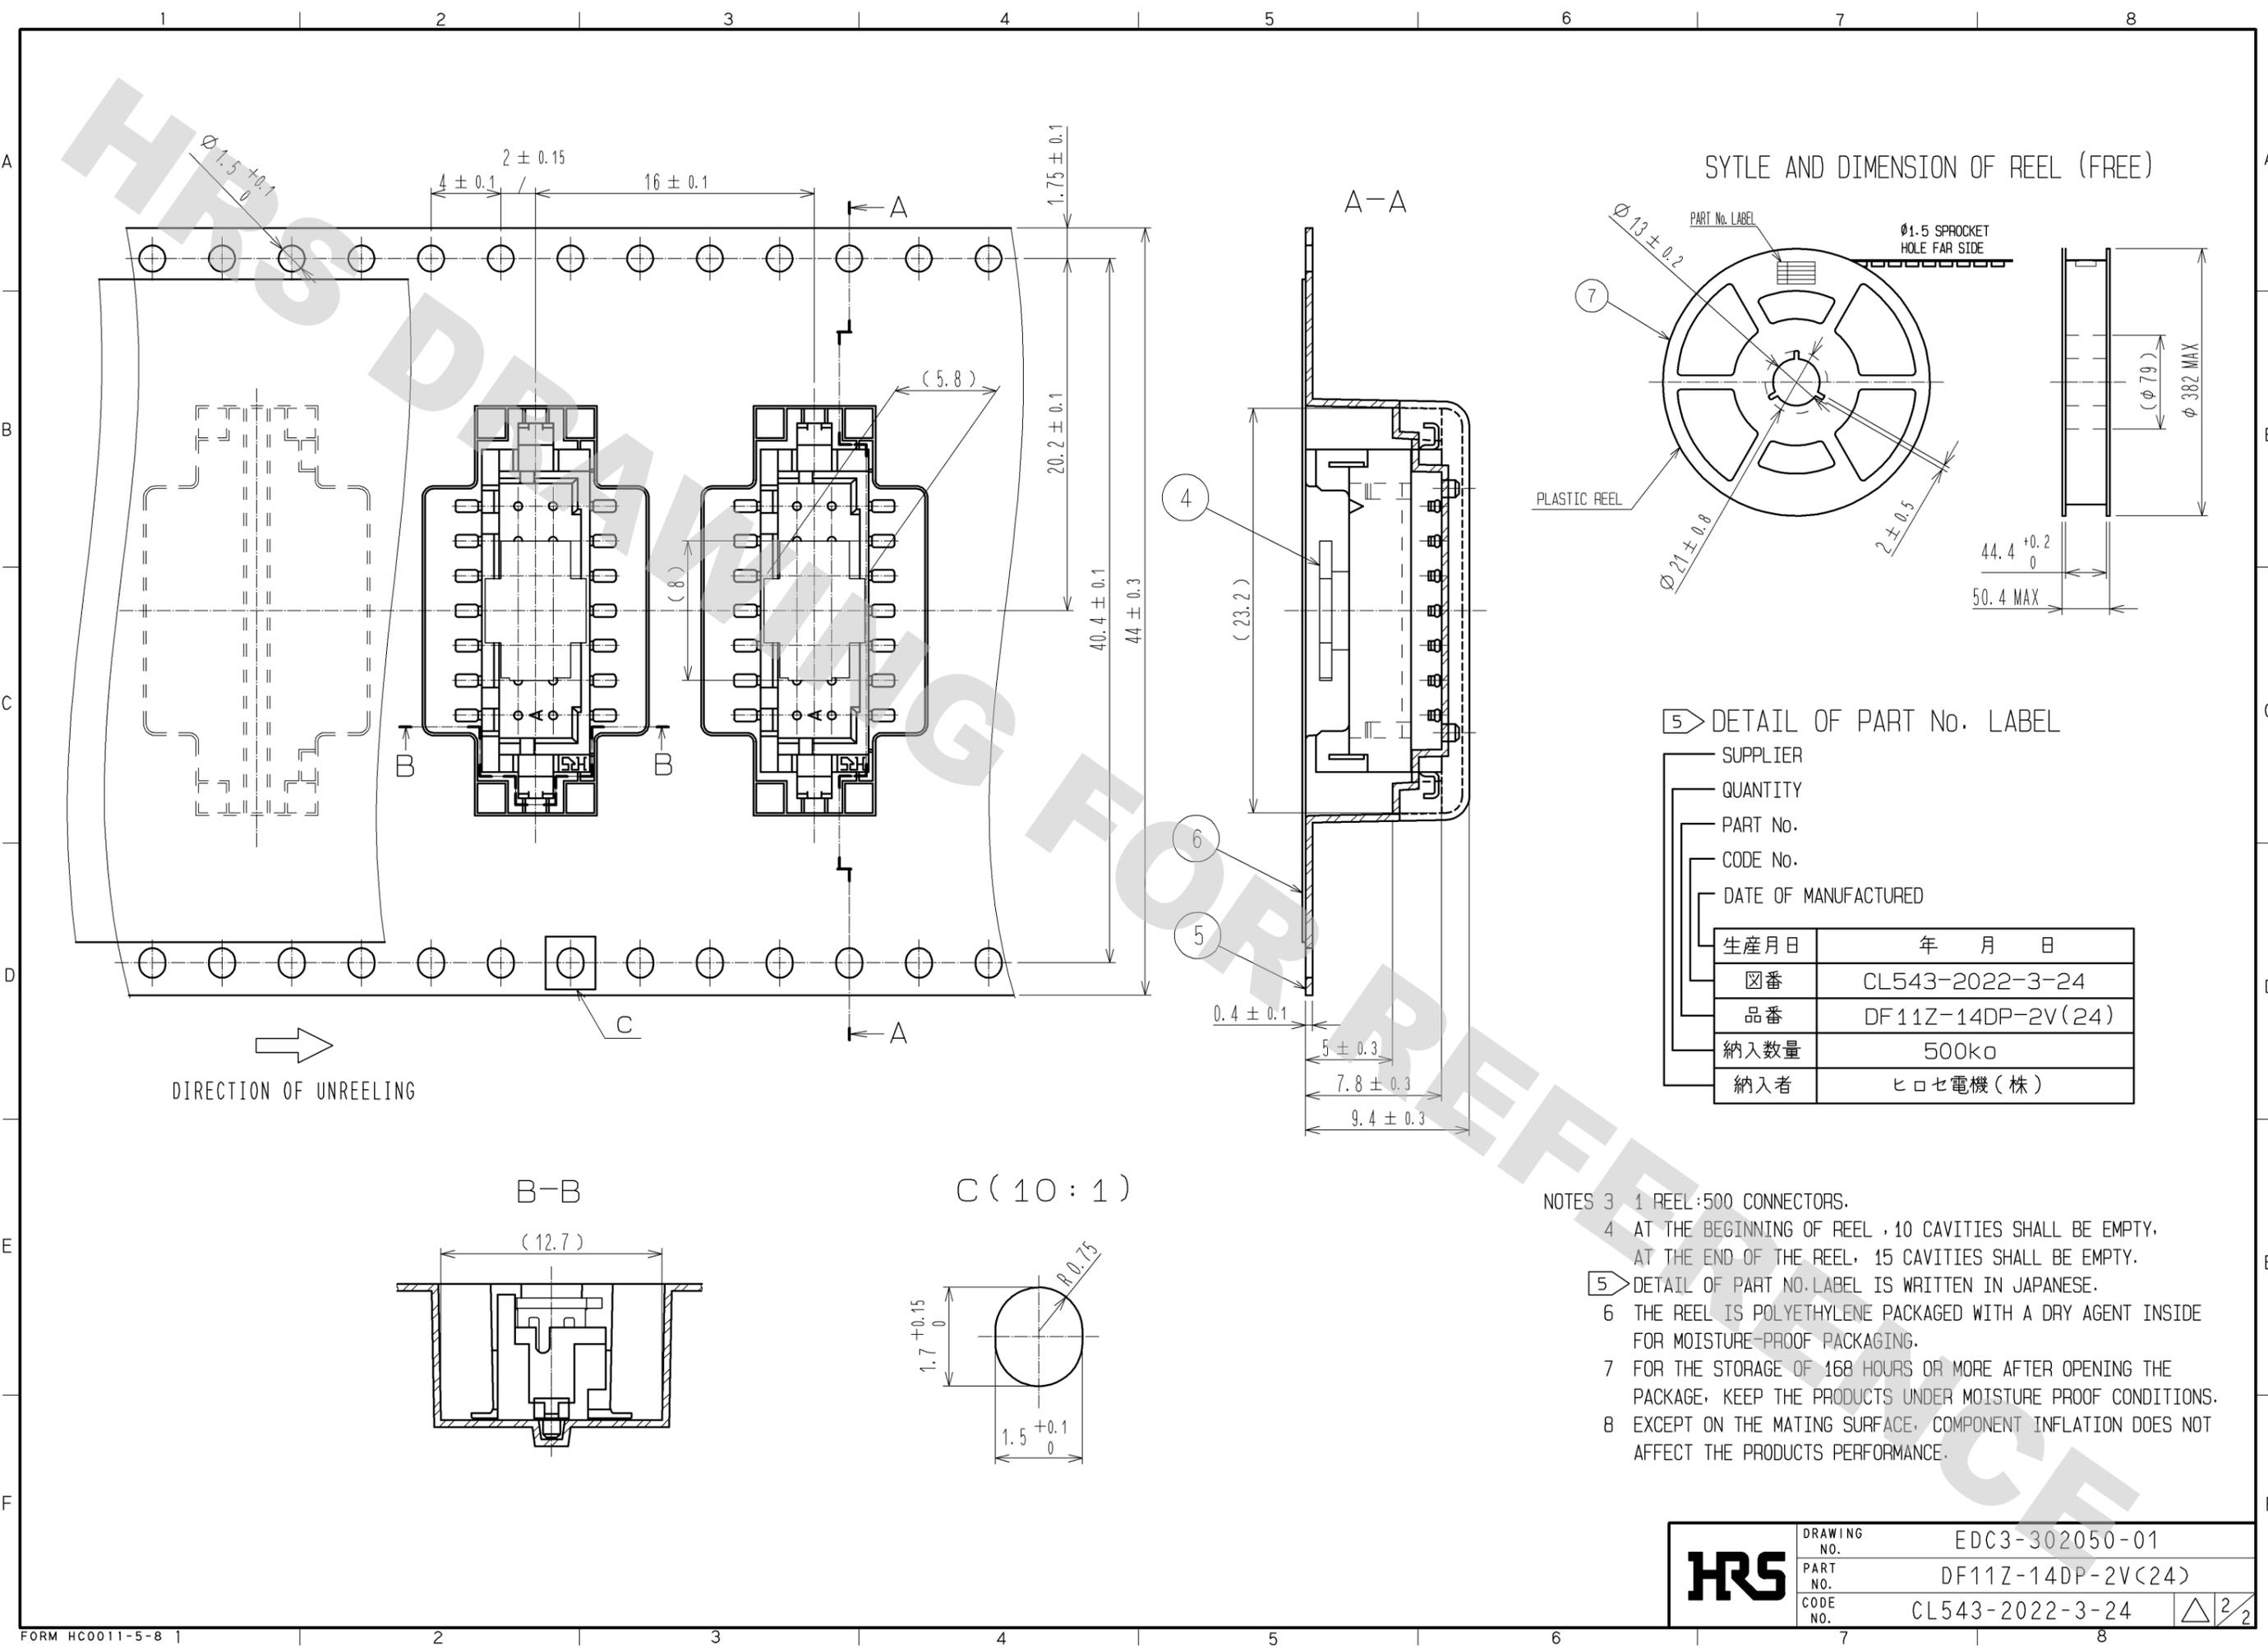

SYTLE AND DIMENSION OF REEL (FREE)

5) DETAIL OF PART No. LABEL

SUPPLIER	
QUANTITY	
PART No.	
CODE No.	
DATE OF MANUFACTURED	
生産月日	年 月 日
図番	CL543-2022-3-24
品番	DF11Z-14DP-2V(24)
納入数量	500k $\phi$
納入者	ヒロセ電機(株)

- NOTES
- 3 1 REEL : 500 CONNECTORS.
  - 4 AT THE BEGINNING OF REEL , 10 CAVITIES SHALL BE EMPTY.  
AT THE END OF THE REEL , 15 CAVITIES SHALL BE EMPTY.
  - 5) DETAIL OF PART No. LABEL IS WRITTEN IN JAPANESE.
  - 6 THE REEL IS POLYETHYLENE PACKAGED WITH A DRY AGENT INSIDE FOR MOISTURE-PROOF PACKAGING.
  - 7 FOR THE STORAGE OF 168 HOURS OR MORE AFTER OPENING THE PACKAGE , KEEP THE PRODUCTS UNDER MOISTURE PROOF CONDITIONS.
  - 8 EXCEPT ON THE MATING SURFACE , COMPONENT INFLATION DOES NOT AFFECT THE PRODUCTS PERFORMANCE.

<b>HRS</b>	DRAWING NO.	EDC3-302050-01
	PART NO.	DF11Z-14DP-2V(24)
	CODE NO.	CL543-2022-3-24
		$\triangle$ 2/2