

# IP67 Sealed Toggle Switches

Highest quality for the most demanding applications



## 3100 Series

Standard 15/32" diameter bushing. Standard Bat length is .560".

Current Rating	Catalog No.		Action	Termination
6A -125VAC, 3A-250VAC	3105C	Fig 1	SPST on-none-off	.250" QC
6A -125VAC, 3A-250VAC	3105D	Fig 2	SPST on-none-off	6" Wire Leads, #16 Gauge
6A -125VAC, 3A-250VAC	3101C	Fig 1	SPDT on-none-on	.250" QC
6A -125VAC, 3A-250VAC	3101D	Fig 2	SPDT on-none-on	6" Wire Leads, #16 Gauge
6A -125VAC, 3A-250VAC	3102C	Fig 1	SPDT on-off-on	.250" QC
6A -125VAC, 3A-250VAC	3102D	Fig 2	SPDT on-off-on	6" Wire Leads, #16 Gauge

### 3100 Series Toggle

**Electrical Rating:** 6A - 125 VAC , 3A - 250 VAC

**Life Cycles:** 25,000 **Electrical** (Optional 75,000 with silver rocker) 50,000 **Mechanical** (Optional 100,000 with silver rocker)


**Operating Temp:** -10 °C to +65 °C

**Sealing:** seal tested per IP67 standards to withstand submersion in water to a depth of 1 meter for 30 minutes, Meets IP68

**UL Recognized** File No. E66512, Vol 1, Sec.12

**Dielectric Strength** 1000 Volts RMS Minimum

**Mounting Means** 15/32" Bushing, Keyway .078 - .083 Wide X .037 - .043 Deep, Standard Hardware supplied

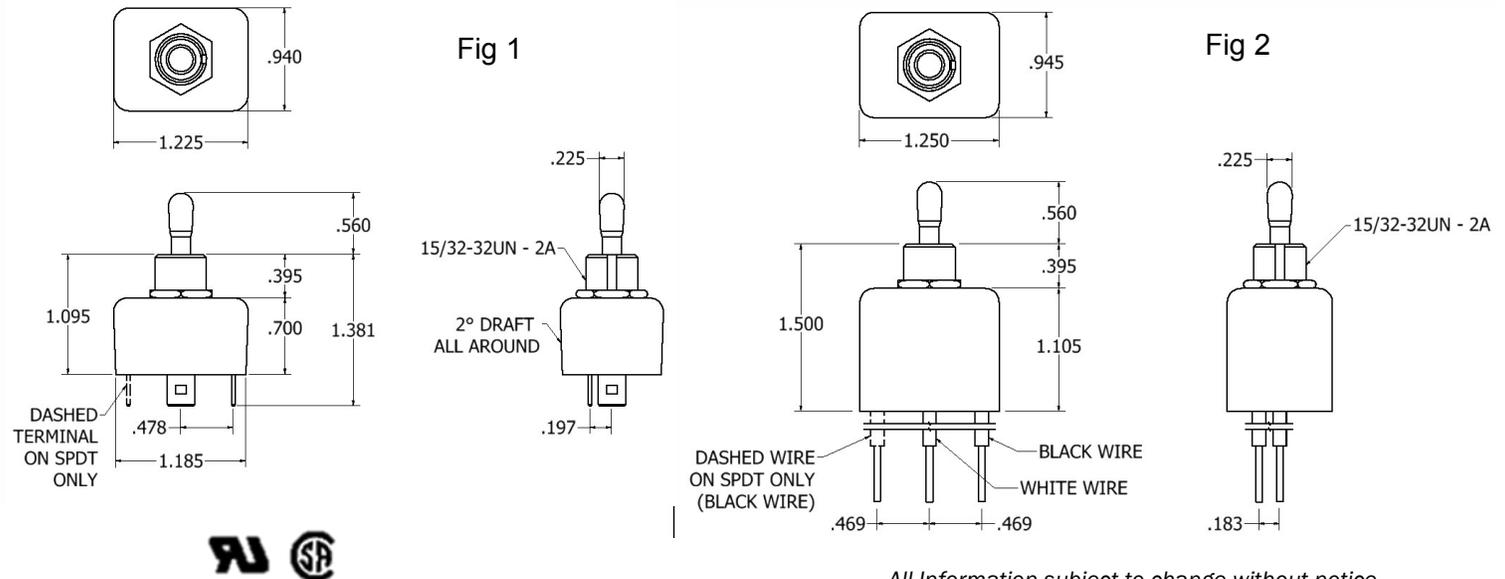

All Information subject to change without notice