VIEW ON MATING SIDE

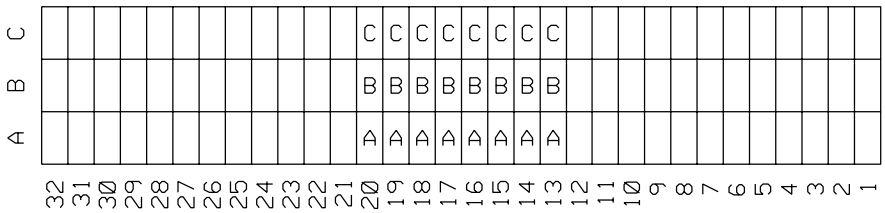

A = 8 CONTACTS L=2,8
B = 8 CONTACTS L=2,8
C = 8 CONTACTS L=2,8

S = 24 TOTAL NUMBER OF CONTACTS

Marking	Standard
Performance level	G1/0 = Contact area level 1 / Termination tin
Flux proof	no
Fixing clip	no
Dimensions	SD-85056-0004 sht.1
Technical Data	PS-85052-0001

C	G1/0	c13-20
B	G1/0	b13-20
A	G1/0	a13-20
Contact symbol	Perform. level	Contact position number

LTR	REVISIONS	FOR PREVIOUS REVISIONS SEE MRI LIST
A	ECN 2478 first release	

UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ±2°

	INCH	METRIC
3 PLACE	± .	±
2 PLACE	± .	±
1 PLACE	± .	±

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DESIGN DIMENSION ☐ MM ☐ IN.

EQUIVALENT DIMENSION ☐ MM ☐ IN.

IF TWO DIMENSIONS ARE SHOWN THE UPPER IS THE DESIGN DIMENSION, LOWER IS SECONDARY

DRWG BY	KN	SIGN
CHK'D BY	Ca	SIGN
APP'D BY	JB	SIGN
SCALE		

REVISE ONLY ON CAD SYSTEM | SH. | REV.

CADCAM PROJECT NAME s8505602 s81

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. & SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

TITLE
24 pos. female connector acc. DIN 41612, style M invert. contacts arrangement

molex MOLEX EUROPE

SHEET NO. 1 OF 1

DATE 97/05/22

PART NO. 85056-0282

DWG NO. SD-85056-0282

SIZE A