

### 20.32mm (0.8INCH) SINGLE DIGIT NUMERIC DISPLAY

Part Number: SC08-12GWA

#### **Features**


- 0.8 inch digit height.
- Excellent character appearance.
- High light output.
- Easy mounting on P.C. boards or sockets.
- Mechanically rugged.
- Standard : gray face, white segment.
- RoHS compliant.

#### **Description**

The Green source color devices are made with Gallium Phosphide Green Light Emitting Diode.

Green

#### **Package Dimensions& Internal Circuit Diagram**

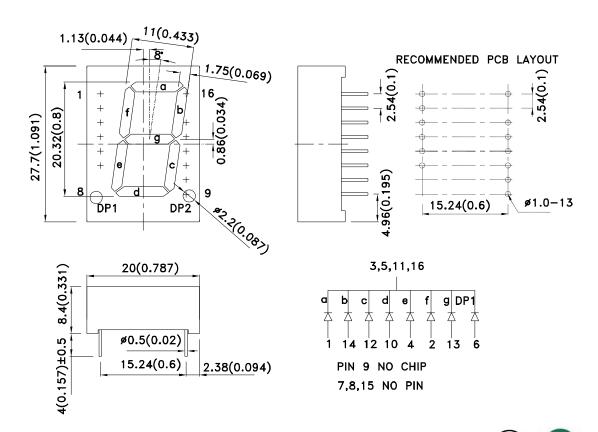



1. All dimensions are in millimeters (inches), Tolerance is ±0.25(0.01")unless otherwise noted.

2. The specifications, characteristics and technical data described in the datasheet are subject to change without prior notice.

SPEC NO: DSAD2297 REV NO: V.9 DATE: APR/01/2011 PAGE: 1 OF 6
APPROVED: WYNEC CHECKED: Joe Lee DRAWN: J.Yu ERP: 1301000764

#### **Selection Guide**

Part No.	Dice	Lens Type	lv (uc @ 10	,	Description
		,	Min.	Тур.	•
SC08-12GWA	Green (GaP)	White Diffused	5600	13000	Common Cathode, Lt Hand Decimal.

#### Note:

#### Electrical / Optical Characteristics at TA=25°C

Symbol	Parameter	Device	Тур.	Max.	Units	Test Conditions
λpeak	Peak Wavelength	Green	565		nm	IF=20mA
λD [1]	Dominant Wavelength	Green	568		nm	IF=20mA
Δλ1/2	Spectral Line Half-width	Green	30		nm	IF=20mA
С	Capacitance	Green	15		pF	VF=0V;f=1MHz
VF [2]	Forward Voltage	Green	2.2	2.5	V	IF=20mA
lR	Reverse Current	Green		10	uA	V <sub>R</sub> =5V

#### Absolute Maximum Ratings at TA=25°C


Parameter	Green	Units		
Power dissipation	62.5	mW		
DC Forward Current	25	mA		
Peak Forward Current [1]	140	mA		
Reverse Voltage	5	V		
Operating / Storage Temperature	-40°C To +85°C			
Lead Solder Temperature[2]	260°C For 3-5 Seconds			

Notes: 1. 1/10 Duty Cycle, 0.1ms Pulse Width. 2. 2mm below package base.

SPEC NO: DSAD2297 **REV NO: V.9** DATE: APR/01/2011 PAGE: 2 OF 6 APPROVED: WYNEC **CHECKED:** Joe Lee DRAWN: J.Yu ERP: 1301000764


<sup>1.</sup> Luminous intensity/ luminous Flux: +/-15%.


<sup>1.</sup>Wavelength: +/-1nm. 2. Forward Voltage: +/-0.1V.

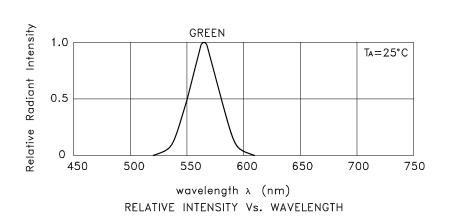



#### Green


#### **SC08-12GWA**









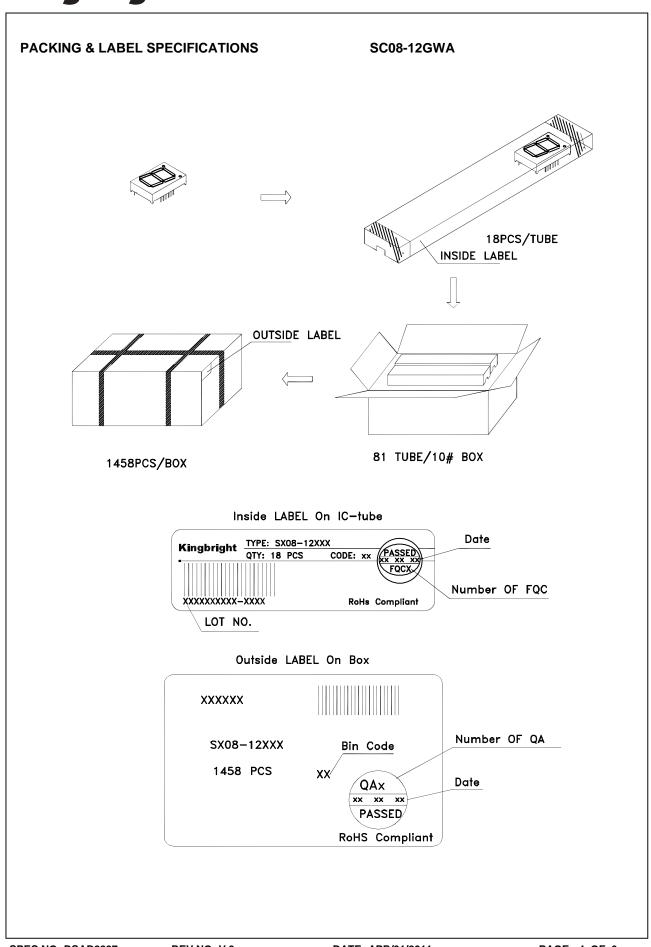


SPEC NO: DSAD2297 APPROVED: WYNEC REV NO: V.9 CHECKED: Joe Lee DATE: APR/01/2011 DRAWN: J.Yu PAGE: 4 OF 6 ERP: 1301000764

#### THROUGH HOLE DISPLAY MOUNTING METHOD


### Lead Forming

Do not bend the component leads by hand without proper tools. The leads should be bent by clinching the upper part of the lead firmly such that the bending force is not exerted on the plastic body.

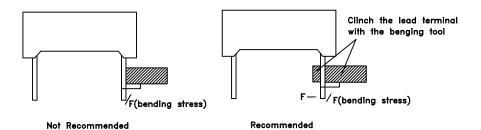


#### Installation

- 1. The installation process should not apply stress to the lead terminals.
- 2. When inserting for assembly, ensure the terminal pitch matches the substrate board's hole pitch to prevent spreading or pinching the lead terminals.



#### DISPLAY SOLDERING CONDITIONS

Wave Soldering Profile For Lead-free Through-hole LED.



#### **NOTES:**

- 1.Recommend the wave temperature 245°C~260°C.The maximum soldering temperature should be less than 260°C.
- 2.Do not apply stress on epoxy resins when temperature is over 85°C.
- 3. The soldering profile apply to the lead free soldering (Sn/Cu/Ag alloy).
- 4.During wave soldering , the PCB top—surface temperature should be kept below  $105^{\circ}$ C 5.No more than once.

SPEC NO: DSAD2297 REV NO: V.9 DATE: APR/01/2011 PAGE: 5 OF 6

APPROVED: WYNEC CHECKED: Joe Lee DRAWN: J.Yu ERP: 1301000764

### Soldering General Notes:


- a. Through—hole displays are incompatible with reflow soldering.
- b. If components will undergo multiple soldering processes, or other processes where the components may be subjected to intense heat, please check with Kingbright for compatibility.

#### **CLEANING**

- 1.Mild "no-clean" fluxes are recommended for use in soldering.
- 2. If cleaning is required, Kingbright recommends to wash components with water only. Do not use harsh organic solvents for cleaning, because they may damage the plastic parts .And the devices should not be washed for more than one minute.

#### CIRCUIT DESIGN NOTES

- 1.Protective current—limiting resistors may be necessary to operate the Displays.
- 2.LEDs mounted in parallel should each be placed in series with its own current—limiting resistor.



SPEC NO: DSAD2297 APPROVED: WYNEC REV NO: V.9 CHECKED: Joe Lee DATE: APR/01/2011 DRAWN: J.Yu PAGE: 6 OF 6 ERP: 1301000764