


## Features

- High-speed:  $t_{PD} = 2.3\text{ns}$  typical into  $50\text{pF}$  @  $5\text{V V}_{CC}$
- Broad operating range:  $V_{CC} = 1.65\text{V} - 5.5\text{V}$
- Power down high-impedance inputs/outputs
- High output drive:  $\pm 24\text{mA}$  at  $3\text{V V}_{CC}$
- Packaging (Pb-free & Green available):
  - 5-pin SOT23 (T)
  - 5-pin SC70 (C)


## Pin Configuration



## Description

The PI74STX1G126 is a buffer with 3-state output that operates over the  $1.65\text{V}$  to  $5.5\text{V V}_{CC}$  operating range.

## Block Diagram

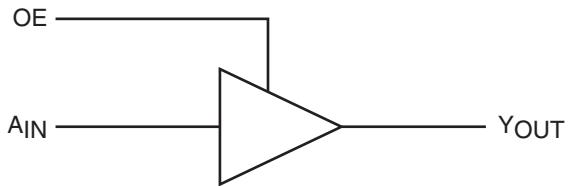

## Pin Description

Pin Names	Description
A <sub>IN</sub>	Input
OE	Input
Y <sub>OUT</sub>	Output

## Function Table

Inputs		Output
OE	A <sub>IN</sub>	Y <sub>OUT</sub>
H	L	L
H	H	H
L	X	Z

### Notes:

H = HIGH Logic Level  
L = LOW Logic Level  
Z = HIGH Impedance

## Recommended Operating Conditions<sup>(1)</sup>

Parameter	Condition	Min.	Max.	Units
Supply Voltage ( $V_{CC}$ )	V	1.65	5.5	V
Input Voltage ( $V_{IN}$ )		0	5.5	
Output Voltage ( $V_{OUT}$ )		0	$V_{CC}$	
Operating Temperature	°C	-40	85	°C
		$V_{CC} = 1.8\text{V}, 2.5\text{V} \pm 0.2\text{V}$	0	
Input Rise and Fall Time ( $t_r, t_f$ )		$V_{CC} = 3.3\text{V}, \pm 0.3\text{V}$	0	
	ns/V	$V_{CC} = 5.0\text{V}, \pm 0.5\text{V}$	0	ns/V

### Notes:

1. Unused inputs must be held HIGH or LOW. They may not float.

## Absolute Maximum Ratings

Supply Voltage (V <sub>CC</sub> ) .....	-0.5V to +6V	DC V <sub>CC</sub> /GND Current (I <sub>CC</sub> /I <sub>GND</sub> ) .....	±50mA
DC Input Voltage (V <sub>IN</sub> ) .....	-0.5V to +6V	Storage Temperature (T <sub>STG</sub> ) .....	-65°C to +150°C
DC Output Voltage (V <sub>OUT</sub> ) .....	-0.5V to +6V	Junction Lead Temperature (IOS) .....	200°C
DC Input Diode Current (I <sub>IK</sub> ) .....	-50mA to 20mA	Power Dissipation SOT23 .....	200mW
DC Output Diode Current (I <sub>OK</sub> ) .....	-50mA to 20mA	SC70 .....	150mW
DC Output Current (I <sub>OUT</sub> ) .....	±50mA		

**Note:**

Absolute maximum ratings are DC values beyond which the device may be damaged or have its useful life impaired. The datasheet specifications should be met, without exception, to ensure that the system design is reliable over its power supply, temperature, and output/input loading variables. Pericom does not recommend operation outside datasheet specifications.

## DC Electrical Characteristics (Over supply voltage and operating temperature ranges, unless otherwise specified)

Symbol	Parameter	V <sub>CC</sub> (V)	Conditions	T <sub>A</sub> = +25°C			T <sub>A</sub> = -40 to +85°C		Units
				Min.	Typ.	Max.	Min.	Max.	
V <sub>IH</sub>	HIGH Level Input Voltage	1.65-1.95 2.3-5.5		0.75V <sub>CC</sub> 0.70V <sub>CC</sub>			0.75V <sub>CC</sub> 0.70V <sub>CC</sub>		
V <sub>IL</sub>	LOW Level Input Voltage	1.65-1.95 2.3-5.5				0.25V <sub>CC</sub> 0.30V <sub>CC</sub>		0.25V <sub>CC</sub> 0.30V <sub>CC</sub>	
V <sub>OH</sub>	HIGH Level Output Voltage	1.65 1.8 2.3 3.0 4.5	V <sub>IN</sub> = V <sub>IL</sub>	I <sub>OH</sub> = -100µA	1.55 1.7 2.2 2.9 4.4	1.65 1.79 2.29 2.99 4.5		1.55 1.7 2.2 2.9 4.4	V
		1.65 2.3 3.0 3.0 4.5		I <sub>OH</sub> = -4mA I <sub>OH</sub> = -8mA I <sub>OH</sub> = -16mA I <sub>OH</sub> = -24mA I <sub>OH</sub> = -32mA	1.29 1.9 2.4 2.3 3.8	1.52 2.13 2.71 2.55 4.20		1.29 1.9 2.4 2.3 3.8	
		1.65 2.3 3.0 3.0 4.5		I <sub>OL</sub> = 100µA		0.01 0.01 0.01 0.00 0.00	0.1 0.1 0.1 0.1 0.1		
		1.65 1.8 2.3 3.0 4.5		I <sub>OL</sub> = 4mA I <sub>OL</sub> = 8mA I <sub>OL</sub> = 16mA I <sub>OL</sub> = 24mA I <sub>OL</sub> = 32mA		0.08 0.10 0.18 0.28 0.28	0.24 0.3 0.4 0.55 0.55		
		1.65 2.3 3.0 3.0 4.5						0.24 0.3 0.4 0.55 0.55	
V <sub>OL</sub>	LOW Level Output Voltage	1.65 2.3 3.0 3.0 4.5	V <sub>IN</sub> = V <sub>IH</sub>	I <sub>OL</sub> = 100µA		0.01 0.01 0.01 0.00 0.00	0.1 0.1 0.1 0.1 0.1		µA
		1.65 1.8 2.3 3.0 4.5		I <sub>OL</sub> = 4mA I <sub>OL</sub> = 8mA I <sub>OL</sub> = 16mA I <sub>OL</sub> = 24mA I <sub>OL</sub> = 32mA		0.08 0.10 0.18 0.28 0.28	0.24 0.3 0.4 0.55 0.55		
I <sub>IN</sub>	Input Leakage Current	0-5.5	V <sub>IN</sub> = 5.5V, GND		-1		1	-1	1
I <sub>OFF</sub>	Power Off Leakage Current	0.0	V <sub>IN</sub> or V <sub>OUT</sub> = 5.5V		-1		1	-1	1
I <sub>CC</sub>	Quiescent Supply Current	1.65-5.5	V <sub>IN</sub> = 5.5V, GND				2.0		20

**AC Electrical Characteristics**

Symbol	Parameter	V <sub>CC</sub> (V)	Conditions	T <sub>A</sub> = +25°C			T <sub>A</sub> = -40 to +85°C		Units	Fig. No.
				Min.	Typ.	Max.	Min.	Max.		
t <sub>PLH</sub> , t <sub>PHL</sub>	Propagation Delay	1.8 ±0.15	C <sub>L</sub> = 15pF, R <sub>D</sub> = 1 Mohm, S <sub>1</sub> = Open	0.7	4.5	5.4	0.7	5.9	ns	1
		2.5 ±0.2		0.5	2.7	3.6	0.5	4.0		3
		3.3 ±0.3		0.5	2.1	2.9	0.5	3.2		
		5.0 ±0.5		0.5	1.7	2.2	0.5	2.4		
t <sub>PLH</sub> , t <sub>PHL</sub>	Propagation Delay	3.3 ±0.3	C <sub>L</sub> = 50pF, R <sub>D</sub> = 500 ohms, S <sub>1</sub> = Open	0.5	3.0	4.2	0.5	4.6	ns	1
		5.0 ±0.5		0.5	2.3	3.2	0.5	3.5		3
t <sub>PZL</sub> , t <sub>PZH</sub>	Output Enable Time	1.8 ±0.15	C <sub>L</sub> = 50pF, R <sub>D</sub> = 500 ohms, R <sub>U</sub> = 500 ohms, S <sub>1</sub> = GND for t <sub>PZH</sub> S <sub>1</sub> = V <sub>IN</sub> for t <sub>PZL</sub> V <sub>IN</sub> = 2 x V <sub>CC</sub>	2	8.2	11.8	2	12.3	ns	1
		2.5 ±0.2		1.5	4.4	6.8	1.5	7.5		3
		3.3 ±0.3		1.5	3.1	4.8	1.5	5.3		
		5.0 ±0.5		0.8	2.2	3.3	1.5	3.6		
t <sub>PLZ</sub> , t <sub>PHZ</sub>	Output Disable Time	1.8 ±0.15	C <sub>L</sub> = 50pF, R <sub>D</sub> = 500 ohms, R <sub>U</sub> = 500 ohms, S <sub>1</sub> = GND for t <sub>PHZ</sub> S <sub>1</sub> = V <sub>IN</sub> for t <sub>PLZ</sub> V <sub>IN</sub> = 2 x V <sub>CC</sub>	2	7.3	9.2	2	9.7	ns	1
		2.5 ±0.2		1.5	4.7	5.0	1.5	5.5		3
		3.3 ±0.3		1.0	3.6	4.0	1.5	4.4		
		5.0 ±0.5		0.8	2.6	3.2	1.5	3.5		
C <sub>IN</sub> , C <sub>OUT</sub>	Input Capacitance Output Capacitance	V <sub>IN</sub> = 0 V <sub>OUT</sub> = 0			4				pF	
C <sub>PD</sub>	Power Dissipation Capacitance <sup>(1)</sup>	3.3 5.0			17					2
					19					

**Notes:**

1. C<sub>PD</sub> is defined as the value of the internal equivalent capacitance which is derived from dynamic operating current consumption (I<sub>CCD</sub>) at no output loading and operating at 50% duty cycle (see Figure 2). C<sub>PD</sub> is related to I<sub>CCD</sub> dynamic operating current by the expression: I<sub>CCD</sub> = (C<sub>PD</sub>)(V<sub>CC</sub>)(f<sub>IN</sub>) + (I<sub>CC</sub> static).

### AC Loading and Waveforms

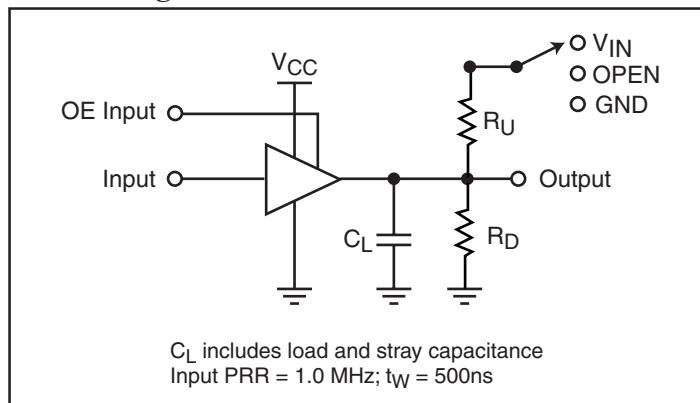


Figure 1. AC Test Circuit

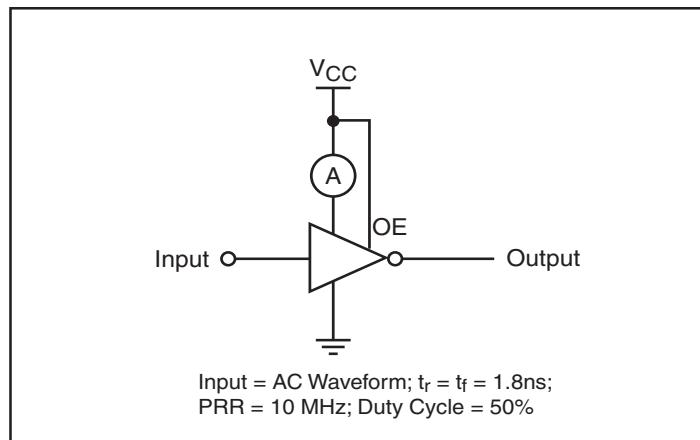


Figure 2. I<sub>CCD</sub> Test Circuit



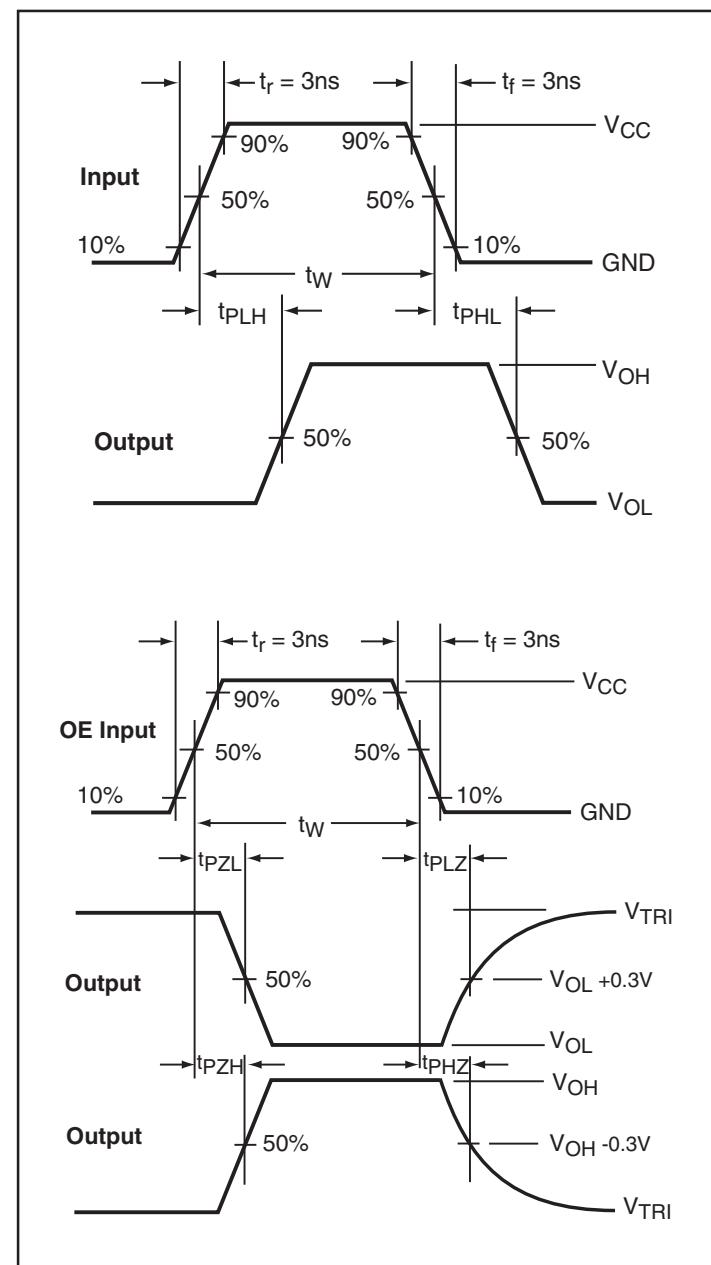


Figure 3. AC Waveforms

### Packaging Mechanical: 5-Pin SOT23 (T)

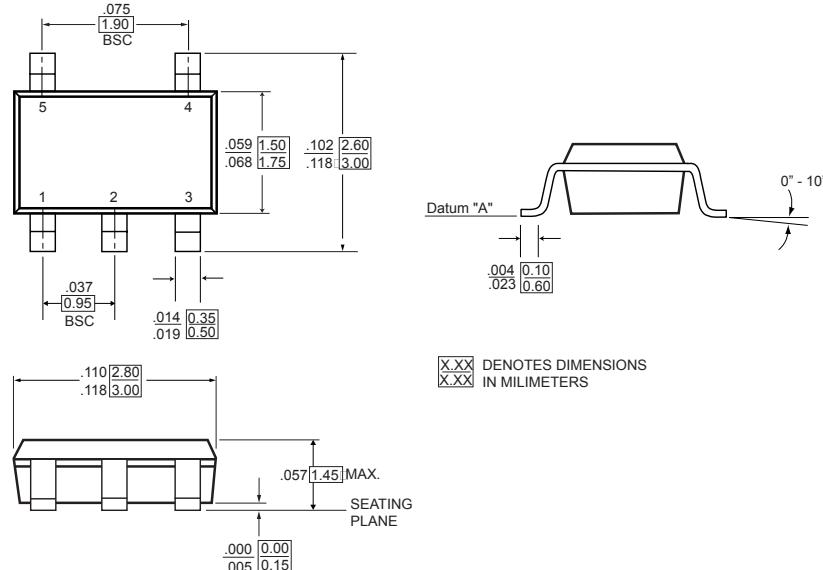

### Packaging Mechanical: 5-Pin SC70 (C)

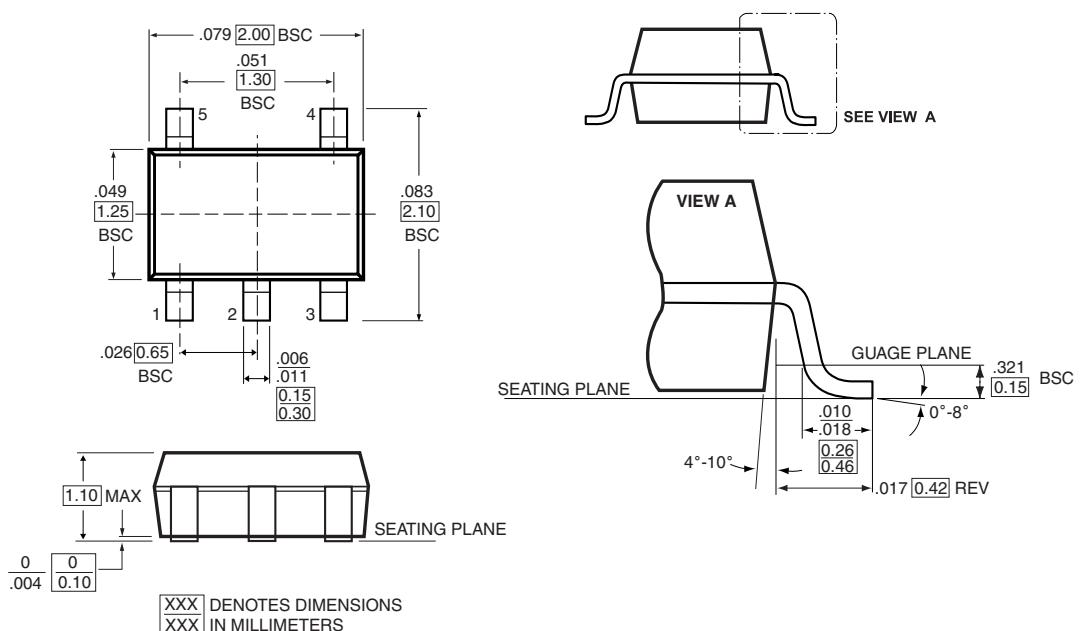



PI74STX1G126  
SOTiny™ Gate STX  
Buffer with 3-State Output

## Ordering Information

Ordering Code	Package Code	Package Description	Top Marking
PI74STX1G126TX	T	5-pin, SOT23	BB
PI74STX1G126TEX	T	Pb-free & Green, 5-pin, SOT23	BB
PI74STX1G126CX	C	5-pin, SC70	BB
PI74STX1G126CEX	C	Pb-free & Green, 5-pin, SC70	BB

### Notes:

- Thermal characteristics can be found on the company web site at [www.pericom.com/packaging/](http://www.pericom.com/packaging/)
- E = Pb-free & Green
- Adding an X suffix = Tape/Reel